

Heat Shrink Tubing - continued

RNF-100 — 2:1 Shrink Ratio - continued

1.2m Lengths		Mftrs. List No.	Order Code	Price Per Length				
Dia.	Nom Shrink			1+	5+	10+	25+	+
Clear								
1.2	0.6	RNF-100-3/64-X-4FT	121-0429	125.00	122.00	119.00	116.00	--
1.6	0.8	RNF-100-1/16-X-4FT	121-0430	108.00	106.00	102.00	99.00	--
2.4	1.2	RNF-100-3/32-X-4FT	121-0431	108.00	106.00	102.00	99.00	--
3.2	1.6	RNF-100-1/8-X-4FT	121-0432	125.00	122.00	119.00	116.00	--
4.8	2.4	RNF-100-3/16-X-4FT	121-0433	127.00	124.00	121.00	118.00	--
6.4	3.2	RNF-100-1/4-X-4FT	121-0434	170.00	166.00	162.00	157.00	--
9.5	4.8	RNF-100-3/8-X-4FT	121-0435	223.00	216.00	212.00	207.00	--
12.7	6.4	RNF-100-1/2-X-4FT	121-0436	258.00	251.00	245.00	239.00	--
19.0	9.5	RNF-100-3/4-X-4FT	121-0437	315.00	305.00	298.00	291.00	--
25.4	12.7	RNF-100-1-X-4FT	121-0438	444.00	432.00	421.00	410.00	--
38.0	19.0	RNF-100-1-1/2-X-4FT	121-0441	770.00	748.00	732.00	711.00	--
51.0	25.4	RNF-100-2-X-4FT	121-0442	1,155.00	1,122.00	1,096.00	1,066.00	--

Bulk Spools

Dia.		Mftrs. List No.	Order Code	Price Per Reel			
Nom.	ShrinkLength			1+	2+	10+	50+
Black							
3.2	1.6	150m RNF-100-1/8-0-SP	121-0575	9,628.00	8,686.00	8,245.00	7,404.00
4.8	2.4	150m RNF-100-3/16-0-SP	121-0576	9,956.00	8,826.00	8,376.00	7,525.00
6.4	3.2	75m RNF-100-1/4-0-SP	121-0577	6,399.00	5,788.00	5,467.00	4,918.00
9.5	4.8	121m RNF-100-3/8-0-FSP	121-0578	13,237.00	11,972.00	11,308.00	10,176.00
12.7	6.4	91m RNF-100-1/2-0-FSP	121-0581	11,680.00	10,565.00	9,977.00	8,980.00
19.0	9.5	60m RNF-100-3/4-0-FSP	121-0582	9,275.00	8,390.00	7,923.00	7,131.00
25.4	12.7	60m RNF-100-1-0-FSP	121-0583	12,121.00	10,965.00	10,354.00	9,318.00

DR-25 Diesel Resistant - 2:1 Shrink Ratio



- Flexible, Black elastomer tubing
- Resistant to aviation and diesel fuels, hydraulic fluids and lubricating oils
- Ideal for use where a rugged, fluid resistant tube is necessary
- Long-term fluid and heat resistance
- Protects against abrasion and mechanical damage
- 2:1 shrink ratio
- MIL-DTL-23053/16 (except 1/8 and 3/16), VG 95343 Part 5 Type D, BS 3G-198 Part 3 10A and Def. Stan. 59-97 Issue 3 Type 6B approved
- Minimum full recovery temperature +175°C
- Operating temperature -75°C to +150°C


Mftrs. List No.	Nom.	Dia. Shrink	Spool Length	Order Code
DR-25-1/8-0	1.6	10m	341-5478	
DR-25-3/16-0	2.4	10m	341-5480	
DR-25-1/4-0	3.2	10m	341-5491	
DR-25-3/8-0	4.8	10m	341-5508	
DR-25-1/2-0	6.4	7m	341-5510	
DR-25-3/4-0	9.5	5m	341-5521	
DR-25-1-0	12.7	4m	341-5533	

Mftrs. List No.	Order Code	Price Per Spool				
		1+	5+	10+	25+	+
DR-25-1/8-0	341-5478	3,605.00	3,493.00	2,999.00	2,552.00	--
DR-25-3/16-0	341-5480	3,948.00	3,513.00	3,351.00	2,786.00	--
DR-25-1/4-0	341-5491	4,270.00	3,794.00	3,500.00	3,261.00	--
DR-25-3/8-0	341-5508	5,029.00	4,458.00	3,627.00	3,561.00	--
DR-25-1/2-0	341-5510	4,160.00	3,703.00	3,302.00	3,040.00	--
DR-25-3/4-0	341-5521	3,995.00	3,547.00	3,420.00	2,672.00	--
DR-25-1-0	341-5533	4,946.00	4,399.00	3,945.00	3,670.00	--

Heat Shrink Moulded Transitions 2:1 Shrink Ratio



(after heating)

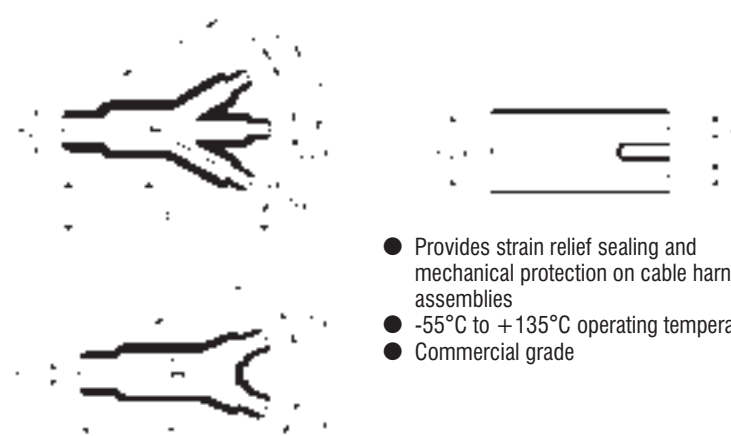

- Provides strain relief sealing and mechanical protection on cable harness assemblies
- -55°C to +135°C operating temperature
- Commercial grade


Expanded as supplied (min)		Recovered after heating (max)					Mftrs. List No.	Order Code	
H	J	H	J	P	R	S			C
Y Transitions									
13	7	6.1	3.3	22	19			382A012-15-0	769-307
27	13	12.4	6.1	38	43			382A023-15-0	769-319
39	27	18.0	12.4	66	82			382A034-15-0	769-320
3 to 1 transitions									
13	7	6.6	3.6	46	25	21	30	462A011-15-0	769-332
27	13	13.2	6.9	93	50	43	30	462A023-15-0	769-344

Mftrs. List No.	Order Code	Price Each			
		1+	100+	250+	500+
382A012-15-0	769-307	427.00	350.00	322.00	326.00
382A023-15-0	769-319	647.00	530.00	489.00	465.00
382A034-15-0	769-320	1,305.00	1,070.00	1,048.00	997.00
462A011-15-0	769-332	693.00	640.00	595.00	--
462A023-15-0	769-344	951.00	878.00	855.00	--

Heat Shrink Connector Boots




- Provides mechanical protection and connector-cable strain relief
- No lip provides direct installation onto connector thread
- Flame retardant
- -55°C to +135°C operating temperature

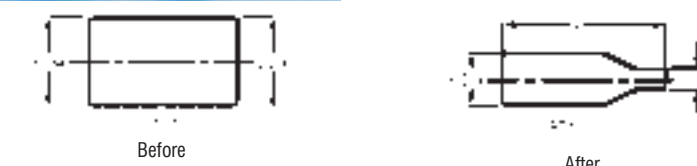

Expanded (min)		Recovered (max)			Mftrs. List No.	Order Code
H	J	H	J	P		
24	24	9.9	5.3	38	202A121-15-0	769-265
28	28	14.2	6.6	51	202A132-15-0	769-277
31	31	17.8	7.4	67	202A142-15-CS-0	769-289
36	36	21.9	8.6	74	202A153-15-0	769-290

Mftrs. List No.	Order Code	Price Each			
		1+	100+	250+	+
202A121-15-0	769-265	289.00	251.00	224.00	--
202A132-15-0	769-277	385.00	356.00	332.00	--
202A142-15-CS-0	769-289	433.00	401.00	391.00	--
202A153-15-0	769-290	495.00	431.00	446.00	--

Wire-Wire and Earth Wire-Screen Splices

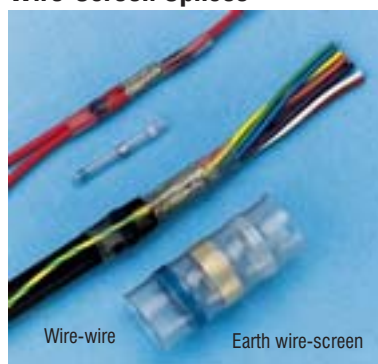

- Solder Sleeve[®] provides an environmental sealed, insulated and strain relieved solder connection
- Suitable for splicing wires and screens
- Repairing broken/sheered wires
- Splicing ground wire to screen for earthing

Expanded (Min)		Recovered (Max.)		
H	J	H	J	P
24	24	9.9	5.3	38
28	28	14.2	6.6	51
31	31	17.8	7.4	67
36	36	21.9	8.6	74

Total Wire Diameter (mm)		Total CSA of Conductors (mm ²)		Length	Mftrs. List No.	Order Code
min	max	min.	max.			
Wire-wire and wire-screen, 100 per box						
0.8	1.7	0.22	0.72	26	B-155-3801	119-6243
1.0	1.95	0.40	0.95	26	B-155-3802	119-6244
1.3	2.7	0.82	1.75	42	B-155-3803	119-6245