



## Copper Beryllium Finger Strips Saw Tooth Style



- Single and double, saw tooth style, copper beryllium finger strips
- Fitted with self-adhesive tape for easy application to box lids, inspection covers and gland plates etc.



End view 752-976  
Finger width = 4.2  
Gap between fingers = 0.4



End view 752-988  
Finger width = 4.2  
Gap between fingers = 0.4


Operating temperature -55°C to +230°C.

Mfrs. List No. CB1103T = 752-976, CB1092T = 752-988

FIL184

| 0.5m Lengths     | Order Code | Price Each |     |     |     |
|------------------|------------|------------|-----|-----|-----|
|                  |            | 1+         | 10+ | 20+ | 50+ |
| Single Saw Tooth | 752-976    |            |     |     |     |
| Double Saw Tooth | 752-988    |            |     |     |     |

## Gasket Strip-Extra Soft

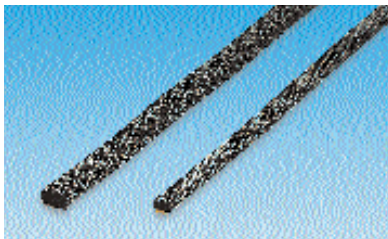


- Extra Soft Shielding Strip for commercial enclosures, cabinets and panels requiring minimum closure force or where wide tolerance gaps exist.
- Constructed from a single layer of fine monel wire, knitted over a closed cell neoprene sponge
- Excellent shielding performance when compressed by 25%, compression up to 50% can be applied to improve environmental sealing
- Pressure-sensitive adhesive backing ensures easy application

Monel wire thickness 80µm. Operating temperature -40°C to +80°C

FIL185

| 5m Reels  | Order Code | Price Per Reel |     |     |     |
|-----------|------------|----------------|-----|-----|-----|
|           |            | 1+             | 10+ | 25+ | 50+ |
| Size AxB  |            |                |     |     |     |
| 6x4       | 752-939    |                |     |     |     |
| 9x6       | 752-940    |                |     |     |     |
| 10m Reels |            |                |     |     |     |
| 6x4       | 752-952    |                |     |     |     |
| 9x6       | 752-964    |                |     |     |     |

## Knitted Yarn Gasket – 'Soft-Shield 2000'



- Designed to provide an economic EMI seal for commercial electronic enclosures.
- **Shielding Performance:** >70dB attenuation from 20MHz to 10GHz
- **Closure Force:** Requires <0.175 N/mm (1lb./inch) closure force
- Self terminating - simply cut to length
- Pressure-sensitive adhesive (PSA) for ease-of-use and quick mounting
- Standard lengths 5m and 10m3

Mfrs. List No. 01-1392+Gasket Profile

FIL95

| Dimensions (W H)               | Chomerics Gasket Profile | Order Code | Price Each |    |     |     |
|--------------------------------|--------------------------|------------|------------|----|-----|-----|
|                                |                          |            | 1+         | 5+ | 10+ | 25+ |
| <b>Square Shape - 5m</b>       |                          |            |            |    |     |     |
| 5.1mm 5.1mm                    | 6790                     | 187-999    |            |    |     |     |
| 6.4mm 6.4mm                    | 6791                     | 287-118    |            |    |     |     |
| 9.5mm 9.5mm                    | 6793                     | 188-001    |            |    |     |     |
| <b>D Shape - 5m</b>            |                          |            |            |    |     |     |
| 3.6mm 2.5mm                    | 6903                     | 188-013    |            |    |     |     |
| 9.5mm 6.4mm                    | 6792                     | 188-025    |            |    |     |     |
| 12.7mm 9.5mm                   | 6902                     | 188-037    |            |    |     |     |
| <b>Rectangular Shape - 5m</b>  |                          |            |            |    |     |     |
| 6.4mm 3.3mm                    | 6794                     | 188-049    |            |    |     |     |
| 12.7mm 6.4mm                   | 9797                     | 188-050    |            |    |     |     |
| <b>Square Shape - 10m</b>      |                          |            |            |    |     |     |
| 5.1mm 5.1mm                    | 6790                     | 188-062    |            |    |     |     |
| 6.4mm 6.4mm                    | 6791                     | 188-074    |            |    |     |     |
| 9.5mm 9.5mm                    | 6793                     | 188-086†   |            |    |     |     |
| <b>D Shape - 10m</b>           |                          |            |            |    |     |     |
| 3.6mm 2.5mm                    | 6903                     | 188-098†   |            |    |     |     |
| 12.7mm 9.5mm                   | 6902                     | 188-116†   |            |    |     |     |
| <b>Rectangular Shape - 10m</b> |                          |            |            |    |     |     |
| 12.7mm 6.4mm                   | 6797                     | 188-130    |            |    |     |     |

†Available until stocks are exhausted

## Fabric Wrapped Foam Gasket Soft-Shield® 5000



Mfrs List No. 82-121+gasket profile

- **Shielding performance** >90dB attenuation from 20MHz to 10GHz
- **Closure force** <0.175N/mm (1lb./inch), 5 times lower than standard gaskets
- Asymmetrical profiles as well as C, V and D shapes
- Self terminating nickel-plated silver woven nylon rip-stop fabric jacket
- Pressure sensitive adhesive (PSA) for ease-of-use and quick mounting
- Standard 1 metre length

FIL157

| 1m Lengths               | Dimensions (W H) | Chomerics Gasket profile | Order Code | Price Each |    |     |
|--------------------------|------------------|--------------------------|------------|------------|----|-----|
|                          |                  |                          |            | 1+         | 5+ | 10+ |
| <b>Square Shape</b>      |                  |                          |            |            |    |     |
|                          | 5.1 5.1          | 74017                    | 137-248    |            |    |     |
|                          | 6.0 6.0          | 74022                    | 137-250    |            |    |     |
|                          | 9.5 9.5          | 74024                    | 137-261    |            |    |     |
| <b>Rectangular Shape</b> |                  |                          |            |            |    |     |
|                          | 4.8 3.3          | 74015                    | 137-273    |            |    |     |
|                          | 9.5 6.4          | 74016                    | 137-285    |            |    |     |
|                          | 12.7 9.5         | 74021                    | 137-297    |            |    |     |
| <b>D Shape</b>           |                  |                          |            |            |    |     |
|                          | 2.3 2.3          | 74019                    | 137-303    |            |    |     |
|                          | 6.4 3.6          | 74006                    | 137-315    |            |    |     |
|                          | 9.5 6.4          | 74011                    | 137-327    |            |    |     |
| <b>V Shape</b>           |                  |                          |            |            |    |     |
|                          | 10.7 9.8         | 74008                    | 137-339    |            |    |     |
|                          | 14.7 17.1        | 74010                    | 137-340    |            |    |     |

## Shielding



### NSC – Nickel Screening Compound

- 100% Ozone Friendly
- Excellent surface resistivity
- Excellent adhesion
- Fast drying
- Excellent attenuation levels

### SCP – Silver Conductive Paint

- Highly conductive silver loaded resin
- Fast drying
- Ideal for track repair
- Ideal for pinpoint shielding

**Warning:** Both of the above products contain flammable contents, do not use on live equipment or near any source of ignition, use in a well ventilated area.

FIL258

| Mfrs. List No. | Order Code | Price Each |    |     |     |
|----------------|------------|------------|----|-----|-----|
|                |            | 1+         | 6+ | 12+ | 36+ |
| 400ml Aerosol  | NSC400H    | .521-450.  |    |     |     |
| 3g Bottle      | SCP03B     | 725-614.   |    |     |     |