


AIR HOSE ASSEMBLIES • DRILLS

ASH-250C SERIES AIR HOSE ASSEMBLIES



Hose assemblies are made of durable polyurethane hose with excellent recoil recovery. High chemical resistance with maximum flexibility. Lightweight for ease of movement. Assemblies include reusable swivel fittings. Burst pressure: 428PSI @ 68°C. Operating temperature: -104°F to +175°F. All 1/4" hose will fit AA-TPR series drivers; order separately online or call.

| Mfg. Part No. | OD x ID x L | Retractable Length | Fittings | Stock No. | Price Each |
|----------------|-------------------|--------------------|----------|-----------|------------|
| ASH-250C-10MSZ | 3/8" x 1/4" x 10' | 7" | 1/4" | 35H8580 | 30.13 |
| ASH-250C-15MSZ | 3/8" x 1/4" x 15' | 9 1/2" | 1/4" | 35H8581 | 34.23 |
| ASH-250C-25MSZ | 3/8" x 1/4" x 25' | 15 1/2" | 1/4" | 35H8584 | 53.82 |

(75379)

ELECTRA SERIES ELECTRIC SCREWDRIVERS



AE5681

Aimco's Electra Series Screwdrivers are lightweight and compact offering an ergonomic design. Precise torque controlled fastening with automatic shut-off clutches. Torque levels can be easily adjusted by simply turning the external adjustment ring. Bit shank: 1/2"(6.35mm). State-of-the-art design provides comfortable grip temperature for operator comfort and extended motor life. ESD models available. UL listed and CE approved. AE-7010 and AE-8010 require external power supply, P/N AE-78PS.

| Mfg. Part No. | Torque Range (in. - lbs.) | Speed (rpm) | Length in. (mm) | Weight lbs. (kg) | Power Supply | Stock No. | Price Each |
|---------------|---------------------------|-------------|-----------------|------------------|---------------------|-----------|------------|
| AE-5681 | 3.0 - 17.0 | 1000 | 99.3 (233) | 1.18 (0.54) | 115VAC | 35H8082 | 835.48 |
| AE-5681ESD | 3.0 - 17.0 | 1000 | 99.3 (233) | 1.18 (0.54) | 115VAC | 35H8083 | 971.47 |
| AE-7010 | 6.1 - 17.4 | 750 | 99.3 (236) | 1.4 (0.64) | 30VDC (P/N AE-78PS) | 35H8089 | 577.59 |
| AE-8010 | 10.4 - 26.0 | 550 | 99.3 (236) | 1.4 (0.64) | 30VDC (P/N AE-78PS) | 35H8095 | 577.59 |

EXTERNAL POWER SUPPLIES

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--|-----------|------------|
| AE-24PS | External Power Supply for AE-4010, AE-4510, AE-4510ESD | 35H8070 | 298.94 |
| AE-78PS | External Power Supply for AE-7010, AE-8010 | 35H8093 | 298.94 |

(75378)

RIGHT ANGLE DRILL ATTACHMENT

Just Added

DURATOOL

- Works with hand and power drills, or sanding and buffing attachments
- Removable handle for right or left handed use
- 3/8" chuck capacity



Right angle drill attachment allows you to get into tight corners or awkward angles. Includes chuck key and blow-molded case.

| Mfg Part No. | Description | Stock No. | Price Each |
|--------------|-------------------------------|-----------|------------|
| 22-9722 | Drill Attachment, Right Angle | 63M0347 | 14.95 |

(137202)



eInvoices

Now you can view, print or email Newark invoices from our website under MY ACCOUNT eSuite. Log in or register today.

(148830)

CORDLESS 4V SCREWDRIVER KIT

- 1/4" hex drive
- Heavy-duty 2 speed gearbox — 200/600 rpm
- 21 position clutch with auto shut-off for improved torque control
- Delivers 30 in.-lbs. of torque
- Quick-change chuck for one-handed bit changes
- 3.0 Ah lithium-ion battery for superior run-time and long life
- Battery fuel gauge displays remaining run-time
- 5-year manufacturer's warranty



Mfg. part no. 0490-22 cordless 4V screwdriver has a 21 position clutch with auto shut-off that stops rotation of the bit once the desired torque setting is met. The quick-change chuck allows for one-handed bit changes, and a snug bit grip prevents dropped screws when the screwdriver is inverted. Drill mode easily drills pilot holes or removes damaged screws. Size: 11 1/2"L. Includes 4V lithium-ion battery, 4V Li-Ion battery charger and screwdriver bit.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-----------------------------|-----------|------------|
| 0490-22 | Cordless 4V Screwdriver Kit | 42M1337 | 229.32 |

(113773)

3/8" CLOSE QUARTER ANGLE DRILL

- 3/8" keyed angled chuck
- Metal framed gear train for long life — 0 to 1300 rpm
- 1/2"-20 spindle
- Double-insulated construction
- Non-slip textured palm grip
- 5-year manufacturer's warranty



Mfg. part no. 0370-20 close quarter angle drill provides a unique chuck angle for reaching into tight areas. Its large paddle trigger and textured grip area provides comfort and control in all positions. The angled cord exit keeps the 8-ft. fixed cord out of the work area. The convenient forward/reverse lever is easy-to-use in close quarters. Size: 11"L. Rated: 120VAC, 3.5A. Includes chuck key with holder. Bits and accessories also available.; go online or call.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--------------------------------|-----------|------------|
| 0370-20 | 3/8" Close Quarter Angle Drill | 96M8782 | 196.56 |

(113772)

CORDLESS 12V SUB-COMPACT MICRO DRIVER DRILL

- Quick bit-loading 1/4 in. hex chuck for bit insertion and release with one hand
- Metal gear housing for job site durability — 0 to 500 rpm
- Sub-compact 7" length fits in tight areas for increased convenience
- Delivers 100 in.-lbs. of torque
- Battery fuel gauge for displaying remaining run-time
- Built-in LED for illumination of dark work spots
- Variable speed trigger for output power control
- Overmolded side and grip for secure grip and work surface protection
- 5-year manufacturer's warranty



Mfg. part no. 2401-22 sub-compact micro driver drill has the power to drive the majority of common small fasteners, and the run-time of full day screw driving without recharging. Comes complete with: #2 Phillips 1/4" hex insert bit, 6F-7R 1/4" hex insert bit, 12V Li-Ion battery pack, 12V battery charger and storage bag.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--|-----------|------------|
| 2401-22 | Cordless 12V 1/4" Sub-Compact Micro Driver Drill | 96M8784 | 226.59 |

(113774)

CORDLESS 18V COMPACT DRIVER DRILL

- 1/2" ratcheting chuck with plastic sleeve
- Heavy-duty 2-speed metal gear box — 0-350 and 0-1400 rpm
- Compact 7 3/4" length fits in tight areas for increased convenience
- Motor delivers 400 in.-lbs. of maximum torque
- Built-in LED light illuminates work surfaces
- Lightweight — only 4 lbs.
- 5-year manufacturer's warranty




Mfg. part no. 2601-22 compact driver drill has been built to withstand tough jobsite conditions. Longer run-time and fewer battery changes maintains momentum to get the job done fast. Its balance, weight and grip have been optimized to reduce user fatigue. Superior bit grip prevents frequent bit retightening and lost bits. Comes complete with: 1/2" 3-jaw keyless chuck, 18V Li-Ion battery pack, 18V battery charger and belt hook to free up both hands for work positioning before fastening.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--|-----------|------------|
| 2601-22 | Cordless 18V 1/2" Compact Driver Drill | 75M9444 | 362.18 |

(113775)

DRILL BITS

1/4" HEX DRIVE POWER BITS

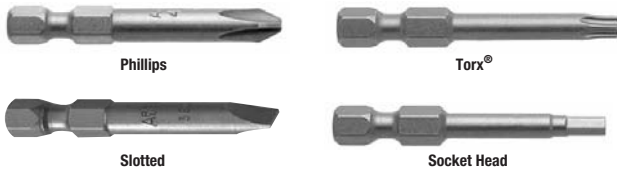

PHILLIPS

| Mfg. Part No. | Description | Length | Stock No. | Price Each |
|---------------|-------------|----------|-----------|------------|
| 4910X | #5 Phillips | 1 1/16" | 97H3822 | 3.42 |
| 4910-AX | #0 Phillips | 2 3/4" | 97H3820 | 4.96 |
| 4910-BX | #0 Phillips | 3 1/2" | 97H3821 | 8.31 |
| 491X | #1 Phillips | 1 15/16" | 97H3819 | 1.69 |
| 491-AX | #1 Phillips | 2 3/4" | 97H3816 | 1.92 |
| 491-BX | #1 Phillips | 3 1/2" | 97H3817 | 2.46 |
| 491-CX | #1 Phillips | 6" | 97H3818 | 5.34 |
| 492X | #2 Phillips | 1 15/16" | 97H3826 | 1.48 |
| 492-AX | #2 Phillips | 2 3/4" | 97H3823 | 1.76 |
| 492-BX | #2 Phillips | 3 1/2" | 97H3824 | 2.11 |
| 492-CX | #2 Phillips | 6" | 97H3825 | 4.94 |

Torx®

| | | | | |
|------------|-----------|----------|---------|-------|
| 49-TX-06 | Torx® T6 | 1 15/16" | 97H3810 | 8.57 |
| 49-A-TX-06 | Torx® T6 | 2 3/4" | 97H3804 | 9.80 |
| 49-TX-07 | Torx® T7 | 1 15/16" | 97H3811 | 8.92 |
| 49-A-TX-07 | Torx® T7 | 2 3/4" | 97H3805 | 10.26 |
| 49-TX-08 | Torx® T8 | 1 15/16" | 97H3812 | 8.57 |
| 49-A-TX-08 | Torx® T8 | 2 3/4" | 97H3806 | 9.43 |
| 49-TX-09 | Torx® T9 | 1 15/16" | 97H3813 | 9.04 |
| 49-A-TX-09 | Torx® 9 | 2 3/4" | 97H3807 | 10.28 |
| 49-TX-10 | Torx® T10 | 1 15/16" | 97H3814 | 5.48 |
| 49-A-TX-10 | Torx® 10 | 2 3/4" | 97H3808 | 5.92 |
| 49-TX-15 | Torx® T15 | 1 15/16" | 97H3815 | 5.48 |
| 49-A-TX-15 | Torx® T15 | 2 3/4" | 97H3809 | 6.19 |

SLOTTED

| | | | | |
|----------|-------------------|-----------|---------|------|
| 320-000X | 1F-2R Slotted | 1 15/16" | 97H3801 | 3.08 |
| 320-00X | 2F-3R Slotted | 1"-15/16" | 97H3800 | 3.10 |
| 320-0X | 3F-4R Slotted | 1"-15/16" | 97H3799 | 3.17 |
| 320-1X | 4F-5R Slotted | 1-15" | 97H3802 | 2.90 |
| 320-2X | 5F-6R Slotted | 1 15/16" | 97H3803 | 2.28 |
| AM-02 | 1/16" Socket Head | 1"-15/16" | 97H3793 | 6.33 |

SOCKET HEAD

| | | | | |
|---------|-------------------|-----------|---------|------|
| AM-02-A | 5/16" Socket Head | 1"-15/16" | 97H3794 | 6.33 |
| AM-03 | 3/32" Socket Head | 1"-15/16" | 97H3795 | 6.33 |
| AM-03-A | 7/64" Socket Head | 1"-5/16" | 97H3796 | 6.36 |
| AM-04 | 1/8" Socket Head | 1"-5/16" | 97H3797 | 6.08 |
| AM-04-A | 9/64" Socket Head | 1"-15/16" | 97H3798 | 6.15 |

(78704)


HEX AND FEMALE SQUARE DRIVE BIT HOLDERS



| Mfg. Part No. | Description | Length (in.) | Stock No. | Price Each |
|---------------|--|--------------|-----------|------------|
| M-490 | 1/4" Hex Magnetic | 2 3/32" | 97H3831 | 16.08 |
| M-490-2 | 1/4" Hex Magnetic | 2 | 97H3832 | 15.96 |
| M-490-4 | 1/4" Hex Magnetic | 4 | 64J0155 | 22.43 |
| 825 | 1/4" Female Square Drive, Non-Magnetic | 1 | 97H3833 | 7.96 |
| 838 | 3/8" Female Square Drive, Non-Magnetic | 1 1/2 | 97H3834 | 7.26 |

(78714)

1/4" HEX DRIVE INSERT BITS

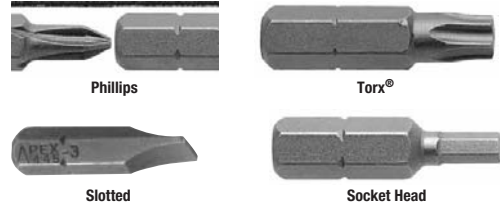

PHILLIPS

| Mfg. Part No. | Description | Length | Stock No. | Price Each |
|---------------|-------------|--------|-----------|------------|
| 446-0X | #0 Phillips | 1" | 97H3644 | 1.79 |
| 440-1X | #1 Phillips | 1" | 97H3636 | 0.82 |
| 446-1X | #1 Phillips | 1" | 97H3645 | 0.84 |
| 440-2X | #2 Phillips | 1" | 97H3637 | 0.82 |
| 446-2X | #2 Phillips | 1" | 97H3646 | 0.84 |

TORX®

| | | | | |
|------------|-----------|----|---------|------|
| 440-TX-06X | Torx® T6 | 1" | 97H3629 | 6.22 |
| 440-TX-07X | Torx® T7 | 1" | 97H3630 | 4.21 |
| 440-TX-08X | Torx® T8 | 1" | 97H3631 | 3.41 |
| 440-TX-09X | Torx® T9 | 1" | 97H3632 | 3.41 |
| 440-TX-10X | Torx® T10 | 1" | 97H3633 | 3.41 |
| 440-TX-15X | Torx® T15 | 1" | 97H3634 | 3.41 |
| 440-TX-20X | Torx® T20 | 1" | 97H3635 | 3.41 |

SLOTTED


| | | | | |
|----------|---------------|----|---------|------|
| 445-000X | 1F-2R Slotted | 1" | 97H3641 | 3.80 |
| 445-00X | 2F-3R Slotted | 1" | 97H3640 | 3.55 |
| 445-0X | 3F-4R Slotted | 1" | 97H3638 | 3.57 |
| 445-10X | 4F-5R Slotted | 1" | 97H3642 | 3.26 |
| 445-20X | 5F-6R Slotted | 1" | 97H3643 | 3.24 |

SOCKET HEAD (MALE HEX)

| | | | | |
|---------|-------------------|----|---------|------|
| 185-00X | 1/16" Socket Head | 1" | 97H3623 | 3.61 |
| 185-0X | 5/64" Socket Head | 1" | 97H3622 | 2.92 |
| 185-1X | 3/32" Socket Head | 1" | 97H3624 | 2.92 |
| 185-9X | 7/64" Socket Head | 1" | 97H3628 | 3.40 |
| 185-2X | 1/8" Socket Head | 1" | 97H3626 | 2.79 |
| 185-10X | 9/64" Socket Head | 1" | 97H3625 | 2.92 |
| 185-3X | 5/32" Socket Head | 1" | 97H3627 | 2.79 |

(78709)

MASONRY TWIST DRILL BIT SETS

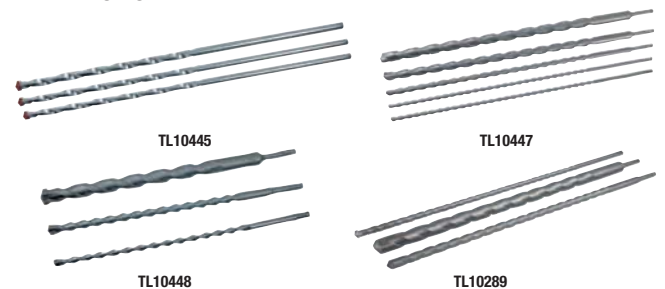

3-PIECE CARBON STEEL DRILL BIT SET

400mm masonry drill bit set in sizes 8, 10 and 12mm. Material: Carbon Steel.

5-PIECE SDS DRILL BIT SET

SDS shanks are uniquely suited to hammer drilling in concrete masonry, lightweight block and stone. Tungsten carbide tipped, ground centre point. Sizes: 10, 12, 16, 22 and 25mm.

3-PIECE SDS DRILL BIT SET, 400mm Length

SDS shanks are ideal for concrete masonry, lightweight block and stone. Tungsten carbide tipped with ground centre point. Sizes: 12, 16 and 25mm. Length: 400mm.

3-PIECE SDS DRILL BIT SET, 600mm Length

SDS shanks are uniquely suited to hammer drilling in stone and concrete. Tungsten carbide tipped with ground centre point. Copper brazed. Sizes: 12mm, 16mm and 24mm. Length 600mm.

| Mfg. Type No. | Description | Stock No. | Price 1-99 |
|---------------|--|-----------|------------|
| TL10445 | 3-Piece Masonry Drill Bit Set | 99M1210 | 2.04 |
| TL10447 | 5-Piece Masonry Drill Bit Set, SDS Shanks | 99M1211 | 15.73 |
| TL10448 | 3-Piece Masonry Drill Bit Set, SDS Shanks, 400mm | 99M1212 | 8.30 |
| TL10289 | 3-Piece Masonry Drill Bit Set, SDS Shanks, 600mm | 99M1202 | 12.19 |

(116755)

DRILL BITS

METRIC DRILL BIT SETS

DURATOOL



TL10449



TL10441



TL-10516



TL10517



TL10518



TL10519

19-PIECE TITANIUM DRILL BIT SET

Titanium nitride coated drill bit set with advanced split point for drilling wood and plastic. Sizes include: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5 and 10mm.

20-PIECE DRILL BIT SET, HSS MICRO

Titanium coated. For power drill use. Sizes include: 0.3, 0.35, 0.4, 0.45, 0.5, 0.55, 0.6, 0.65, 0.7, 0.75, 0.8, 0.85, 0.9, 0.95, 1.0, 1.2, 1.3, 1.4, 1.5 and 1.6mm.

48-PIECE DRILL BIT SET

13pcs HSS Titanium coated drill set: 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5mm; 4pcs Masonry drill: 3, 5, 6, 10mm; 5pcs Wood flat drill: 10, 13, 16, 19, 22mm; 4pcs Hole saw: 32, 38, 45, 54mm; 1pc Hole saw adaptor; 8pcs 50mm CRV bits; 4pcs 38mm CRV bits; 7pcs Nut drivers: 5, 6, 7, 8, 9, 10, 11mm; 2pcs Screw finder; Blow molded carry/storage case.

100-PIECE DRILL BIT SET

21pcs HSS Titanium coated drills: 1.0, 1.5, 2.0, 2.5, 3.0, 3.2, 3.5, 4.0, 4.0, 4.2, 4.5, 5.0, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 9.0, 10.0mm; 8pcs Masonry drills: 3, 4, 5, 6, 7, 8, 9, 10mm; 8pcs Woodworking drills: 3, 4, 5, 6, 7, 8, 9, 10mm; 6pcs Flat wood drill bits: 14, 16, 18, 20, 22, 24mm; 4pcs Hole saw: 32, 38, 45, 54mm; 1pc Hole saw mandrel; 3pcs Drill stoppers; 3pcs Drill finders: 3, 4, 5mm; 21pcs 25mm length bits: Slotted: 4.5, 5.0, 6.0mm; Phillips: PH1, PH2, PH3; Poz: PZ1, PZ2, PZ3; Torx: T10, T15, T20, T25, T30; Hexagon: 3, 4, 5, 6mm; Square: S1, S2, S3; 12pcs 50mm length bits: Slotted: 4.5, 5.0, 6.0mm; Phillips: PH1, PH2, PH3; Poz: PZ1, PZ2, PZ3; Torx: T10, T15, T20; 6pcs Nut drivers: 6, 7, 8, 10, 12, 13mm; 3pcs Hex key: 2.5, 3.0, 4.0mm; 1pc Magnetic holder; 1pc Screwdriver; 1pc 225mm lever model; 1pc Center drill; Blow molded carry/storage case.

204-PIECE DRILL BIT SET

42 HSS Twist drills set: 1x4, 1.5x4, 2x4, 2.5x4, 3x4, 3.2x4, 3.5x4, 4x4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 9, 10mm; 51 Titanium coated high speed drill bit: 1x5, 1.5x5, 2x5, 2.5x5, 3x5, 3.2x5, 3.5x5, 4x5, 4.5x4, 4.8x4, 5.0x4, 5.5x4, 6.0, 6.5, 7.0, 7.5, 8.0, 9.0, 10.0, 11.0, 12.0, 13.0mm; 50 High speed metal drill bits: 1.0 x 4, 1.5 x 4, 2.0 x 4, 2.5 x 4, 3.0 x 4, 3.2 x 4, 3.5 x 4, 4 x 4, 4.5 x 2, 4.8 x 2, 5.0 x 2, 5.5 x 2, 6.0, 6.5, 7.0, 7.5, 8.0, 9.0, 10.0, 11.0, 12.0, 13.0mm; 21 Masonry drill bits: 4 x 2, 4.5 x 2, 5 x 2, 5.5 x 2, 6 x 2, 7.0, 7.5, 8.0, 8.5, 9.0, 10.0, 11.0, 12.0, 13.0mm; 3-300mm Masonry drill bits: 8, 10, 12mm; 8 Wood boring drill bits: 4, 4.5, 6, 7, 8, 9, 10mm; 6 Flat wood bits: 10, 12, 16, 20, 22, 32mm; 4-300mm Flat wood bits: 8, 10, 12, 14mm; 4-4pc Hole saws with hole saw adaptor: 32, 38, 45, 54mm; 1 Hole saw adaptor; 3 Drill stoppers: 3, 5, 8mm; 20-50mm Screwdriver bit: T10, T15, T20, T25, T27, T30, T40, T45, PZ1, PZ2, PZ3, PH1, PH2, PH3, H3, H4, H5, H6, S1, S2, S3, 3, 4, 5, 6, 7, 8mm; 10 Nut drivers: 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm; 4 Nail punches: 1/2, 2/32, and 4/32; 1 Magnetic bit holder; 3pc Screw finders; 1 Allen Key: 2.5mm; 1 Counter sink; 1 Gauge; Blow molded carry/storage case.

300-PIECE DRILL BIT SET

66-HSS Twist drill set: 1.0x5, 1.5x5, 2.0x5, 2.5x5, 3.0x5, 3.2x5, 3.5x5, 4.0x5, 4.5x4, 4.8x4, 5.0x4, 5.5x4, 6.0, 6.5, 7.0, 7.5, 8.0, 9.0, 10.0, 11.0, 12.0, 13.0mm; 50 High speed metal drill bits: 1.0 x 4, 1.5 x 4, 2.0 x 4, 2.5 x 4, 3.0 x 4, 3.2 x 4, 3.5 x 4, 4 x 4, 4.5 x 2, 4.8 x 2, 5.0 x 2, 5.5 x 2, 6.0, 6.5, 7.0, 7.5, 8.0, 9.0, 10.0, 11.0, 12.0, 13.0mm; 21 Masonry drill bits: 4 x 2, 4.5 x 2, 5 x 2, 5.5 x 2, 6 x 2, 7.0, 7.5, 8.0, 8.5, 9.0, 10.0, 11.0, 12.0, 13.0mm; 3-300mm Masonry drill bits: 8, 10, 12mm; 33 Wood boring drill bits: 4 x 4, 4.5 x 4, 5 x 4, 5.5 x 4, 6 x 4, 6.5 x 4, 7.0, 7.5, 8.0, 8.5, 9.0, 10.0, 11.0, 12.0, 13.0mm; 5 Flat wood bits: 13, 16, 19, 22, 32mm; 4 x 300mm Flat wood bits: 8, 10, 12, 14mm; 4 Hole saws with hole saw adaptor: 45, 54, 60, 64mm; 1 Hole saw adaptor; 4 Drill stoppers: 3, 5, 6, 10; 33-50mm Screwdriver bit: 7pc Slotted: 3, 4, 5, 5.5, 6, 7, 8mm; 4pc Phillips: PH0, PH1, PH2, PH3; 4pc Poz: PZ0, PZ1, PZ2, PZ3; 8pc Star: T10, T15, T20, T25, T27, T30, T40, T45; 7pc Metric Hex: H2, H2.5, H3, H4, H5, H6, H7; 3pc Square: S1, S2, S3; 10 Nutdriver: 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13; 4 Nail punch: 1/2, 2/32, and 4/32; 3 Screw finders; 1 Allen key: 2.5mm; 1 Magnetic bit holder; 1 Counter sink; 1 Gauge. Supplied in a blow molded carry/storage case.

➔ CONTINUED ➔

METRIC DRILL BIT SETS (CONT.)

| Mfg. Type No. | Description | Stock No. | Price 1-49 |
|---------------|----------------------------------|-----------|------------|
| TL10449 | 19-Piece Titanium Drill Bit Set | 99M1213 | 8.61 |
| TL10441 | 20-Piece HSS Micro Drill Bit Set | 99M1207 | 2.34 |
| TL10516 | 48-Piece Drill Bit Set | 99M1215 | 10.53 |
| TL10519 | 100 Piece Drill Bit Set | 99M1218 | 20.10 |
| TL10518 | 204-Piece Drill Bit Set | 99M1217 | 28.59 |
| TL10517 | 300-Piece Drill Set | 99M1216 | 45.15 |

(116726)

STEP DRILL SET

DURATOOL



3-piece, drop forged, high speed steel kit contains 1 x 4-12mm nine step bit, 1 x 4-20mm nine step bit, 1 x 4-30mm fourteen step bit in a convenient carry case.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------|-----------|------------|
| TL10512 | 3-Piece Step Drill Set | 99M1214 | 29.89 |

(116760)

BITS & BIT HOLDERS

DURATOOL

- Tip Size: 1/4"
- Tip type: Hexagonal
- Shank Size: 2.36"



TL10396

TL10397

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------------|-----------|------------|
| TL10396 | Magnetic Bit Holder, 6" | 01N3616 | 0.80 |
| TL10397 | Bits & Adapters, 0.25", 2 pc | 01N3617 | 1.78 |

(116788)

KWIK STEPPER™ STEP BIT SET



Two fluted design step bits for fast, cooler cutting of 10-gauge mild steel plus copper, brass, wood, plastics and laminates. Self-starting tips resist walking or skidding. Multi-hole bits make a broad range of holes with each bit. Three-bit set (34401, 34403 and 36413) for multiple holes from 1/8" through 1 1/8". In case.

| Mfg. Part No. | Stock No. | Price Each |
|---------------|-----------|------------|
| 35884 | 50F6960 | 205.92 |

(5678)

DRILL TAP KIT/BITS



Mfg. part no. DTAPKIT 6-32 to 1/4-20 6 piece drill/tap set. Drill bit material thickness 10 gauge. Material type mild steel, copper, brass, aluminum. Shank 1/4" quick change hex. Drill material hardened high speed steel. Drill point split point with web thinning.



| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------|-----------|------------|
| DTAPKIT | Drill Tap Kit | 96H8409 | 53.18 |
| DTAP1/4-20 | 1/4-20NC Drill/Tap Bit | 96H8414 | 8.43 |
| DTAP10-24 | 10-24NC Drill/Tap Bit | 25K2323 | 8.43 |
| DTAP10-32 | 10-32NF Drill/Tap Bit | 25K2324 | 8.43 |
| DTAP6-32 | 6-32NC Drill/Tap Bit | 25K2326 | 8.43 |
| DTAP8-32 | 8-32NC Drill/Tap Bit | 25K2327 | 8.19 |

(85018)

8

DRILL BITS

HOLE SAW KIT, SCREWDRIVER BIT SET AND QUICK-CHANGE CHUCK



49-22-4070

48-30-0200

HOLE SAW KIT

Mfg. part no. **49-22-4070** 7-pc. job-saver hole saw kit includes: 3/8", 1/4", 1/2" hole saws, arbor, arbor spacer, arbor adapter and an impact-resistant plastic storage case.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------------|-------------------------|------------|
| 49-22-4070 | 7-Pc. Job-Saver Hole Saw Kit | 97B6935 | 78.33 |

SCREWDRIVER BIT SET AND QUICK-CHANGE CHUCK

Mfg. part no. **48-30-0200** 29-pc. screwdriver bit set includes: 4 Phillips bits, 5 slotted bits, 5 hex bits, 4 square-recess bits, 6 Torx® bits, 2 Pozidriv bits, 1/4" adapter, magnetic bit holder and 1/4" hex screwdriver handle, all packaged in a handy storage case. Mfg. part no. **48-03-0005** quick-change chuck allows for rapid, keyless insertion and removal of 1/4" hex drive accessories. Converts 3 jaw chuck into 1/4" quick-change chuck. 3/8" shank.

| | | | |
|------------|----------------------------|-------------------------|-------|
| 48-30-0200 | 29-Pc. Screwdriver Bit Set | 95F4184 | 83.46 |
| 48-03-0005 | Quick-Change Chuck | 95F4182 | 23.35 |

(5827)

HIGH-SPEED STEEL DRILL BITS AND ASSORTMENTS



48-89-9050

48-89-9130

STEP DRILL BIT SETS — HIGH-SPEED STEEL WITH BLACK OXIDE FINISH

| Mfg. Part No. | Description | Stock No. | Price per Set |
|---------------|--|-------------------------|---------------|
| 48-89-8990 | 3-Pc. Step Drill Bit Set: Mfg. Part Nos. 48-89-9100 13-Hole, 48-89-9105 9-Hole, 48-89-8955 6-Hole | 96M8790 | 61.68 |
| 48-89-9050 | 2-Pc. Step Drill Bit Set: Mfg. Part Nos. 48-89-9100 13-Hole, 48-89-9105 9-Hole | 95F4187 | 77.79 |

HEAVY-DUTY STEP DRILL BITS — HIGH-SPEED STEEL WITH BLACK OXIDE FINISH

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--|-------------------------|------------|
| 48-89-9100 | Self-Starting Multi-Hole, 13 Sizes, 1/4" Shank | 95F4188 | 30.63 |
| 48-89-9105 | Self-Starting Multi-Hole, 9 Sizes, 3/8" Shank | 95F4189 | 52.77 |
| 48-89-9110 | Hole-Enlarging Bit, 9 Sizes, 3/8" Shank | 95F4172 | 55.73 |
| 48-89-9115 | Self-Starting 7/8" Knockout, 3/8" Shank | 95F4173 | 55.73 |
| 48-89-9130 | Self-Starting Multi-Hole, 12 Sizes, 3/8" Shank | 95F4176 | 72.50 |

(5826)

INSERT BITS

1" insert bits of special CVM tool steel.



Slotted

Phillips

Torx®

Hex Metric

SLOTTED (25mm)

| Mfg. Part No. | Bit Size | Stock No. | Price Each |
|---------------|-------------|-------------------------|------------|
| 71001 | 4.5 (3/16") | 01C3771 | 1.50 |
| 71002 | 6.5 (1/4") | 01C3772 | 1.48 |
| 71003 | 8.0 (5/16") | 01C4692 | 1.47 |

PHILLIPS

| | | | |
|-------|-----------|-------------------------|------|
| 71100 | #0 x 25mm | 28C2106 | 0.71 |
| 71101 | #1 x 25mm | 91B3490 | 0.86 |
| 71102 | #2 x 25mm | 91B3492 | 0.79 |

TORX®

| | | | |
|-------|------------|-------------------------|------|
| 71505 | T5 x 25mm | 28C2174 | 1.74 |
| 71506 | T6 x 25mm | 01C3767 | 2.20 |
| 71507 | T7 x 25mm | 50B8315 | 2.81 |
| 71508 | T8 x 25mm | 01C3768 | 2.20 |
| 71509 | T9 x 25mm | 01C3769 | 2.14 |
| 71510 | T10 x 25mm | 50B8316 | 2.33 |
| 71515 | T15 x 25mm | 50B8317 | 2.33 |
| 71520 | T20 x 25mm | 50B8318 | 2.33 |
| 71525 | T25 x 25mm | 50B8319 | 2.33 |

➔ CONTINUED ➔

INSERT BITS (CONT.)

TORX®

| Mfg. Part No. | Bit Size | Stock No. | Price Each |
|---------------|------------|-------------------------|------------|
| 71527 | T27 x 25mm | 28C2175 | 1.44 |
| 71530 | T30 x 25mm | 50B8320 | 2.33 |

HEX METRIC


| | | | |
|-------|------------|-------------------------|------|
| 71303 | 1.5 x 25mm | 28C2137 | 1.57 |
| 71306 | 2.0 x 25mm | 28C2138 | 1.57 |
| 71308 | 2.5 x 25mm | 28C2139 | 1.57 |
| 71309 | 3.0 x 25mm | 28C2140 | 1.57 |
| 71312 | 4.0 x 25mm | 28C2141 | 1.57 |
| 71315 | 5.0 x 25mm | 28C2142 | 1.57 |
| 71318 | 6.0 x 25mm | 28C2143 | 1.57 |

HEX INCH

| | | | |
|-------|--------------|-------------------------|------|
| 71326 | 1/16" x 25mm | 20C4055 | 2.05 |
| 71328 | 3/64" x 25mm | 20C4056 | 1.99 |
| 71330 | 1/32" x 25mm | 20C4062 | 2.06 |
| 71333 | 3/64" x 25mm | 20C4065 | 2.06 |
| 71336 | 1/8" x 25mm | 20C4066 | 2.06 |
| 71339 | 5/64" x 25mm | 20C4068 | 1.99 |
| 71342 | 3/32" x 25mm | 23C2390 | 1.49 |
| 71345 | 3/16" x 25mm | 20C4070 | 1.99 |
| 71348 | 7/32" x 25mm | 28C2146 | 1.57 |
| 71351 | 1/4" x 25mm | 28C2147 | 1.57 |

(68811)

POWER BITS

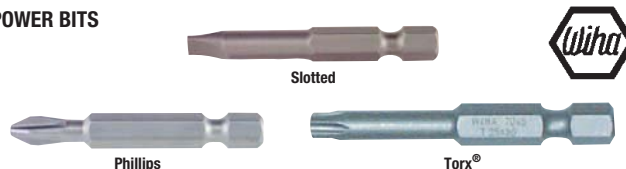

Slotted

Phillips

Torx®

2" power bits of CVM tool steel.

SLOTTED (50mm)

| Mfg. Part No. | Bit Size | Stock No. | Price Each |
|---------------|-----------|-------------------------|------------|
| 74003 | 3.0 1/8" | 28C2248 | 2.18 |
| 74006 | 3.5 9/64" | 28C2249 | 2.18 |
| 74009 | 4.0 5/32" | 28C2250 | 2.18 |
| 74012 | 4.5 3/16" | 28C2252 | 2.18 |
| 74015 | 5.5 7/32" | 28C2253 | 2.18 |
| 74018 | 6.5 1/4" | 28C2255 | 2.18 |

PHILLIPS

| | | | |
|-------|-----------|-------------------------|------|
| 74103 | #1 x 50mm | 28C2259 | 1.30 |
| 74112 | #2 x 50mm | 28C2263 | 1.30 |

TORX®

| | | | |
|-------|------------|-------------------------|------|
| 74511 | T6 x 50mm | 28C2302 | 3.81 |
| 74512 | T7 x 50mm | 28C2303 | 3.81 |
| 74513 | T8 x 50mm | 28C2304 | 3.81 |
| 74517 | T9 x 50mm | 28C2305 | 3.81 |
| 74519 | T10 x 50mm | 28C2306 | 3.81 |
| 74521 | T15 x 50mm | 28C2307 | 3.81 |
| 74523 | T20 x 50mm | 28C2308 | 3.81 |
| 74529 | T25 x 50mm | 28C2309 | 3.81 |
| 74531 | T27 x 50mm | 28C2310 | 3.81 |
| 74533 | T30 x 50mm | 28C2311 | 3.81 |

(68812)



eQuotes

Retrieve and process Newark quotes online from our website under MY ACCOUNT eSuite. Log in or register today.

(148833)

DRILL BITS • DRILL ACCESSORIES

CORDLESS DRIVER KIT



Ideal for driving and removing all types of fasteners. Includes driver, 3.6V NiCad battery, charger, 1 slotted bit, 2 Phillips bits, and a 99PA adapter for 99 series bits. UL listed.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|---------------------|-----------|------------|
| XP1 | Cordless Driver Kit | 83F4091 | 145.90 |

(28342)

DETACHABLE MAGNETIC RINGS FOR SCREWDRIVER BITS



Mag-O-Nets turn virtually any screwdriver bit into a magnetized bit by simply sliding it over the bit collar. Magnetic pull is easily adjustable by moving the Mag-O-Net collar closer to or further from fastener. Color-coded for separating tools by application. 3 sizes available. **Sold in packs of 10.**

| Mfg. Part No. | Description | Pkg. Qty. | Stock No. | Price Each |
|---------------|--|-----------|-----------|------------|
| AM1/4 | Detachable Magnetic Rings for Screwdriver Bits (7mm ID, 19mm OD, Length 10mm) | 10 | 49H8501 | 79.34 |
| AM3/16 | Detachable Magnetic Rings for Screwdriver Bits (3/16 ID, 17.5mm OD, Length 10mm) | 10 | 49H8502 | 79.34 |
| AM5 | Detachable Magnetic Rings for Screwdriver Bits (6mm ID, 17.5mm OD, Length 10mm) | 10 | 49H8503 | 79.34 |

(75383)

ROTARY ACCESSORY SETS



Rotary accessory have everything you will ever need, it is for use with the multi-tool. Cuts, grinds, sands, drills, sharpens and polishes. Works on metal, wood, ceramic, glass and plastic. Grinds and shapes welds, castings, rivet heads and removes rust. Makes clean cuts through fasteners plastics and woods. Fibre reinforced cut-off wheels can be used to clean and polish precious metals such as jewellery and silverware. Can be used for fine detail work including carving, engraving and routing. Can also be used to remove corrosion from metals. Comes with 0.094" and 0.125" shanks.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------------|-----------|------------|
| TL10361 | Rotary Accessory set, 150 pc | 99M1256 | 12.01 |

(116746)

WOOD DRILLS



TL10442



TL10444

AUGER DRILL BIT SET

Manufactured from high carbon steel. For drilling long holes into timber. Hex shank. Can be used with hand brace and power drills. 230mm long. Sizes: 10, 13, 16, 19 and 25mm (3/8", 1/2", 5/8", 3/4", 1").

10-PIECE FLAT WOOD DRILL BIT SET

A set containing 8 precision ground flat drill bits for drilling into all wood types. The set also contains a handy 300mm extension shank complete with a hex key to ensure the drill bits are held firmly in place. Sizes: 6, 10, 13, 16, 20, 22, 25, 32mm. Hardened high carbon steel. Hex shank.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-----------------------------|-----------|------------|
| TL10442 | 5-Piece Wood Auger Set | 99M1208 | 9.94 |
| TL10444 | 10-Piece Flat Drill Bit Set | 99M1209 | 4.53 |

(116735)

WOOD DRILLS



SPC22157



SPC22157

AUGER DRILL BIT SET

Manufactured from high carbon steel. For drilling long holes into timber. Hex shank. Can be used with hand brace and power drills. 230mm long. Sizes: 10, 13, 16, 19 and 25mm (3/8", 1/2", 5/8", 3/4", 1").

10-PIECE FLAT WOOD DRILL BIT SET

A set containing 8 precision ground flat drill bits for drilling into all wood types. The set also contains a handy 300mm extension shank complete with a hex key to ensure the drill bits are held firmly in place. Sizes: 6, 10, 13, 16, 20, 22, 25, 32mm. Hardened high carbon steel. Hex shank.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-----------------------------|-----------|------------|
| TL10442 | 5-Piece Wood Auger Set | 99M1208 | 9.94 |
| TL10444 | 10-Piece Flat Drill Bit Set | 99M1209 | 4.53 |

(116738)

HOLE DEBURRING TOOL



- Cleans burrs from both sides of the hole in seconds, saving time and labor
- Works with any hole size or shape 3/4" or larger
- Use with existing drills, battery or electric powered

SPECIFICATIONS:

| | |
|---------------------|---|
| Material Thickness: | Deburs up to 10 gauge |
| Material Type: | Mild and stainless steel, copper, brass, aluminum |
| Shank: | Minimum chuck size 3/8" |
| Cutter Size: | 13/16" diameter |
| Operation: | Run tool clockwise to deburr, counterclockwise to clear chips |

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|----------------------------|-----------|------------|
| 11170 | Deburring Tool | 09J1712 | 34.36 |
| 11180 | Replacement Cutter, 3 Pack | 09J1713 | 26.94 |

(80166)

DRILL ACCESSORIES • TORQUE SCREWDRIVERS

HEAVY-DUTY CORDLESS SCREWDRIVER KITS

- Adjustable Swivel Handle for Tight Spaces
- 6-Position Adjustable Clutch, Reversing
- 2.4V Battery Pack
- 1-Hour Fast Charge



Mfg. part no. 6546-6 2-speed screwdriver, 2.4V battery pack, 1 hour battery charger, and 2 Phillips, 1 slotted bit. Mfg. part no. 48-11-0100 2.4V Nicad battery pack.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-------------------------|-----------|------------|
| 6546-6 | 2-Speed Screwdriver | 95F4216 | 216.48 |
| 48-11-0100 | 2.4V Nicad Battery Pack | 95F4203 | 52.08 |

(5823)

QUIK-LOK™ DRILL AND DRIVE BIT SETS AND SCREWDRIVER BIT ASSORTMENTS



48-32-0221



48-32-1700



48-32-0300

Mfg. part no. 48-32-1500 38-pc. Quik-Lok™ all-hex drill and drive bit set includes 6" Quik-Lok™ all-hex steel extension and chuck, screw guide, five Phillips® bit tips, four square recess bit tips, #6-8 and #8-10 slotted bit tips, seven power groove bits, six double-ended bits, 1/4" and 3/8" socket adapters, 1/4" and 3/16" magnetic nutsetters, 1/16", 3/64", 1/32", 1/64", 1/8", 3/16" and 1/4" Titanium hex shank drill bits, all packaged in a handy storage case.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--|-----------|------------|
| 48-32-1500 | 38-Pc. Universal Quik-Lok™ All-Hex Drill and Drive Bit Set | 29M6319 | 49.50 |

Mfg. part no. 48-32-0321 21-pc. universal Quik-Lok™ drill and drive set includes quick-change chuck which "locks in" double ended bits, as well as, insert bits and power groove bits, high-speed, long-life titanium drill bits designed to handle any job, regardless of applications, and three magnetic nutdrivers for use with hexagonal type screws. Premium-grade S2 tool steel driver bits are engineered to meet the highest standards for high-torque applications.

| | | | |
|------------|---|---------|-------|
| 48-32-0321 | 21-Pc. Universal Quik-Lok™ Drill and Driver Set | 96M8786 | 31.82 |
|------------|---|---------|-------|

Mfg. part no. 48-32-0221 21-pc. double-ended screwdriver bit set includes the most commonly used bit sizes for everyday applications. Designed for long-life and heavy-duty use, these premium-grade S2 tool steel bits are adaptable for most jobs. Comes neatly packed in a durable storage case with additional space to store accessories up to 6".

| | | | |
|------------|---|---------|-------|
| 48-32-0221 | 21-Pc. Double-Ended Screwdriver Bit Set | 96M8785 | 21.00 |
|------------|---|---------|-------|

Mfg. part no. 48-32-1700 20-pc. insert bit set includes (19) of the most commonly used screwdriver insert bits (Phillips, Square Drive, Torx® and Slotted), one magnetic drive guide and a unique magnetic-backed storage case that attaches to most metal tool boxes for quick and easy access. Premium-quality insert bits made of high-grade S2 tool steel for long life and extreme durability.

| | | | |
|------------|-----------------------------------|---------|-------|
| 48-32-1700 | 20-Pc. Screwdriver Insert Bit Set | 96M8787 | 12.18 |
|------------|-----------------------------------|---------|-------|

Mfg. part no. 48-32-0300 9-pc. bit and screw guide set includes one each: Phillips® #1, #2 and #3 insert bits, #1 and #2 square recess insert bits, 6F-8R, 8R-10F and 10F-12R spade insert bits and screw guide all in a reusable plastic sleeve.

| | | | |
|------------|-------------------------------|---------|-------|
| 48-32-0300 | 9-Pc. Bit and Screw Guide Set | 66F3488 | 22.82 |
|------------|-------------------------------|---------|-------|

(59675)

Expert technical support

Chat online to our team of engineers, or connect to them through your representative.

(148838)

TITANIUM OR THUNDERBOLT® BLACK AND BRONZE DRILL BIT SETS



48-89-1105



48-89-1120



Mfg. part no. 48-89-1105 20-pc. Titanium twisted drill bit set includes cobalt jobber length drill bits from 1/8" through 1/2" diameter, all neatly packaged in a handy storage case. Constructed of titanium for high-performance and longer bit life, these tough, abrasive- and heat-resistant bits drill easily through tough alloys such as heat-treated materials, stainless steel and titanium. Features Secure-Grip™ to prevent bit from slipping in chuck. Heavy-duty 135° split point reduces walking and delivers fast starts on hard materials.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|---------------------------------------|-----------|------------|
| 48-89-1105 | 20-Pc. Titanium Twisted Drill Bit Set | 31M0747 | 48.90 |

Mfg. part nos. 48-89-1120 20-pc. and 48-89-1110 14-pc. Thunderbolt® drill bit sets are designed for use with cordless and other portable drills. The bits are engineered with a thicker web and unique flute form which allows for quicker penetration and improved drilling times. With increased strength built into the web, the Thunderbolt® bit can perform many operations where conventional bits break. The open flute form ejects chips more efficiently when drilling deep holes which helps prevent lock-ups at breakthrough. Black and bronze finished high-speed steel provides heat-resistance, durability and increases bit life.

| | | | |
|------------|---|---------|-------|
| 48-89-1120 | 20-Pc. Thunderbolt Black and Bronze Drill Bit Set | 96M8789 | 42.19 |
| 48-89-1110 | 14-Pc. Thunderbolt Black and Bronze Drill Bit Set | 96M8788 | 28.13 |

(13529)

12-PC. SERIES 99® INTERCHANGEABLE STUBBY BLADE TOOL KIT FOR CORDLESS SCREWDRIVERS



Mfg. part no. 99PA50 Series 99® interchangeable stubby blade screwdriver and nutdriver kit designed for use with cordless, rechargeable screwdrivers. Contains 12 most popular nutdriver and screwdriver sizes: (1) 3/16" stubby nutdriver, (1) 7/32" stubby nutdriver, (1) 1/4" stubby nutdriver, (1) 5/16" stubby nutdriver, (1) 1/2" stubby nutdriver, (1) 3/8" stubby nutdriver, (1) 3/16" stubby slotted screwdriver, (1) 1/4" stubby slotted screwdriver, (1) #1 stubby Phillips screwdriver, (1) 2 stubby Phillips screwdriver, and (1) cordless screwdriver power adapter. All packaged in a convenient vinyl carrying pouch. Order additional mfg. part no. 99PA 1/4" hex chuck power bit adapters separately below.



| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--|-----------|------------|
| 99PA50 | 12-piece Series 99 Interchangeable Stubby Blade Tool Kit | 50F1844 | 28.97 |
| 99PA | 1/4" Hex Chuck Power Bit Adapter | 50F1815 | 6.99 |

(5734)

MICRO-ADJUSTABLE METAL HANDLE TORQUE SCREWDRIVERS



- Positive locking pull down adjustment knob
- Trilobular comfort grip
- Universal 1/4" hex bit holder with strong rare earth magnet
- Cam-over torque limiting clutch
- Easy-to-read window scale
- Light weight ease-of-use
- Automatic lock in counterclockwise direction
- Accuracy: ± 6% of indicated value, CW, from 20% to 100% of full scale
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.



Top to Bottom: 401SM, 151SM, 61SM

Adjustable models offer versatility for applications that require more than one torque value. These torque screwdrivers are particularly suited for the electronics industry and for instrument assembly work. A simple, cam-over design prevents over-tightening and possible damage to components. Torque settings are easily and accurately changed with a unique adjusting knob and easy-to-read window scale. Positive locking knob makes accidental setting changes impossible. Automatic lock in counterclockwise direction makes fastener removal a snap. The Micro-Adjustable series includes six models with torque settings ranging from 20 in. ozs. to 40 in. lbs.

| Mfg. Part No. | Torque Range | Width x Length (In.) | Weight (Lbs.) | Stock No. | Price Each |
|---------------|--------------|----------------------|---------------|-----------|------------|
| 61SM | 20-100 in-oz | 1.10 x 5.50 | 6.8 | 20M2170 | 258.56 |
| 151SM | 3-15 in-lb | 1.10 x 6.25 | 8.0 | 20M1745 | 264.89 |
| 401SM | 5-40 in-lb | 1.20 x 6.375 | 10.8 | 20M1930 | 271.20 |

▶ CONTINUED ▶

TORQUE SCREWDRIVERS • TORQUE TOOLS • TORQUE WRENCHES

MICRO-ADJUSTABLE METAL HANDLE TORQUE SCREWDRIVERS (CONT.)

| Mfg. Part No. | Torque Range | Width x Length (In.) | Weight (Lbs.) | Stock No. | Price Each |
|---------------|--------------|----------------------|---------------|-------------------------|------------|
| 61NSM | 10-80 N-cm | 1.10 x 5.50 | 6.8 | 20M2169 | 258.56 |
| 151NSM | 40-200 N-cm | 1.10 x 6.25 | 8.0 | 20M1744 | 264.89 |
| 401NSM | 50-450 N-cm | 1.20 x 6.75 | 10.8 | 20M1929 | 271.20 |

(89710)

MICRO TORQUE-LIMITING SCREWDRIVERS



Minimaster



Minor Blue

- Precision radial ball clutch "slips-free" when the preset torque is reached preventing over-torquing.
- Thrust bearings insure that the torque setting is independent of any end load applied by the operator.
- Bi-directional operation.
- ESD compliant IEC 61340-5-1:1998
- Tamper-proof internal adjustment. No external adjustment scale - must be preset using a torque analyzer.

TORQUE-LIMITING SCREWDRIVERS

| Mfg. Part No. | Torque Range | Stock No. | Price Each |
|---------------|--------------------|-------------------------|------------|
| 020066 | 3 in-oz/12 in-lb | 49M1774 | 182.00 |
| 020074 | 0.7 in-oz/12 in-oz | 49M1782 | 224.00 |

(113768)

TORQUE-LIMITING SCREWDRIVERS



TS-30

U.S. standard adjustable torque limiting screwdrivers feature precision micrometer scale, easy-release bit holders and anti-backlash design. 1/4" female hex drive. Accuracy: ±6% from 20% of full scale to full scale. Meet or exceed ASME B107.14M and ISO 6789 specifications.



UTICA

TORQUE-LIMITING SCREWDRIVERS

43-Piece Kit

| Mfg. Part No. | Torque | Stock No. | Price Each |
|---------------|-----------|-------------------------|------------|
| TS-30 | 30 in-lb | 97H3849 | 275.04 |
| TS-35 | 36 in-lb | 97H3850 | 266.92 |
| TS-100 | 100 in-oz | 97H3848 | 266.92 |

TORQUE-LIMITING SCREWDRIVER KIT

Kit contains mfg. part no. TS-30 and mfg. part no. TS-100 adjustable torque-limiting screwdrivers, plus 10 screwdriver blades, 2 hex sockets, 2 hex keys, 9 hex bits, 5 phillips bits, 6 1/4"-drive regular sockets, 2 1/4" drive adapters, 2 mini-bit torque holders, plus padded case.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-------------------|-------------------------|------------|
| KT-130 | 43-Piece Tool Kit | 97H3842 | 815.27 |

(78737)

ELECTRONIC TORQUE TESTER



Electronic Torque Tester is ideal for determining correct torque on adjustable torque tools. Unit displays "Peak Torque", "First Peak" and Track Mode values for calibration and verification of stability. 500Hz filter for fast and accurate signal processing. Has Auto Reset button to clear existing torque readings. Battery powered by 2 AA batteries provides 6 hours of continuous use. 110-volt power supply also included. Calibration is easy and can be done on-site. FSD accuracy is ±0.5%. Units of measure include: Nm, kgf-cm, in-lbs, in-oz.

| Mfg. Part No. | Torque Range | | Stock No. | Price Each |
|----------------|--------------|----------|-------------------------|------------|
| | Nm | Lbs. | | |
| ATT-01-110VKIR | 0 - 1 | 0 - 8.8" | 49H8505 | 1096.20 |

(75384)

ELECTRONIC TORQUE TESTERS



CDI TORQUE PRODUCTS
A Snap-on Company

- Integral transducer and sturdy housing allow mounting in virtually any position
- Unique neck design allows the operator to see the LCD display when testing long torque wrenches
- Accuracy: ± 0.3% of indicated value, CW & CCW, from 10% to 100% of full scale + 1 increment or least significant digit
- Four modes of operation: Peak mode, Power Tool mode, First Peak mode and Track mode
- Dual scale (English/Nm or English/cNm, dNm)
- Auto/manual display reset
- Reads bi-directionally (CW and CCW)
- Rechargeable NiCad batteries

The ETT series (Electronic Torque Tester) is a portable torque tester. Unlike a torque calibration system, which can be used to generate a torque wrench certification, the ETT series is battery powered stand-alone torque tester. It can also be used on AC power. Its primary use is to check the accuracy of dial and click type torque wrenches, as well as torque screwdrivers to maintain their accuracy in between calibrations. With the addition of joint rate simulator, the ETT series can also check stall and clutch type pneumatic and electronic torque tools. It should not be used with any impact or pulse type tools. There are eight models with torque ranges from 10 inch ounces up to 600 foot pounds, go online or call.

| Mfg. Part No. | Drive Size (In.) | Torque Range | | Weight (Lbs.) | Stock No. | Price Each |
|---------------|------------------|--------------|--------------|---------------|-------------------------|------------|
| | | English | Newton Meter | | | |
| 1001-0-ETT | 1/4 | 10-100 in-oz | 7.0-70.6 cNm | 4.5 | 20M1664 | 2129.81 |
| 4001-0-ETT | 1/4 | 40-400 in-oz | 28-280 cNm | 4.5 | 20M1927 | 2023.81 |
| 501-I-ETT | 1/4 | 5-50 in-lb | 5.6-56 dNm | 4.5 | 20M1940 | 2279.26 |
| 1001-I-ETT | 1/4 | 10-100 in-lb | 11.3-113 dNm | 4.5 | 20M1663 | 2279.26 |

(89712)

TORQUE-LIMITING SCREWDRIVERS



Ergo Micro Torque screwdriver. Mfg. Part No. EMT12, features a "positive" locking system that prevents incidental torque adjustment. Bi-directional cam "slips free" once the set torque has been reached, making over-tightening impossible. 1/4" F/Hex drive and 2-12 lbf.in torque range. Externally adjustable torque range. Mfg. Part No. EMT50 is similar to EMT12, but with 10 - 50 lbf.in torque range.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|--------------------------|-------------------------|------------|
| 020440 | EMT12 Torque Screwdriver | 49M1951 | 342.00 |
| 020452 | EMT50 Torque Screwdriver | 49M1971 | 355.00 |

(113765)

COMPUTORQ3 ELECTRONIC TORQUE WRENCH

CDI TORQUE PRODUCTS
A Snap-on Company



- Sleek new design
- 15-Degree flex ratcheting head
- Push button socket release head
- Large, easy to read digital display
- Long battery life, uses 2 each CR123 lithium batteries
- Ergonomically designed molded non-slip rubber grip
- Torques in both clockwise and counterclockwise directions
- Battery saving auto-shutoff after two minutes
- Audible tone sounds when set torque value is reached
- Display will hold value and flash for ten seconds when desired torque value is reached
- 3 Color LED light bar
- ACCURACY: ± 2% CW of readings from 20% to 100% of full scale ± 3% CCW of readings from 20% to 100% of full scale
- N.I.S.T. Traceable certificate of calibration included


COMPUTORQ3 series electronic torque wrench is a simple to use digital readout wrench that displays real time torque values in any of four torque units, ft.lbs., in.lbs., Nm, kg.cm. Simply set the desired torque value and apply force until the green LED illuminates. Great for light industrial, automotive, motorcycle, watercraft and aircraft applications.

| Mfg. Part No. | Drive Size (In.) | Torque Range | | | | Length (In.) | Wght. (Lbs.) | Stock No. | Price Each |
|---------------|------------------|--------------|----------|------------|----------|--------------|--------------|-------------------------|------------|
| | | Ft. Lb. | In. Lb. | Nm | Kg. Cm. | | | | |
| 2401C3 | 1/4 | 2-20 | 24-240 | 2.71-27.10 | 27.6-276 | 15 | 2.0 | 20M1881 | 325.48 |
| 1002CF3 | 3/8 | 5-100 | 120-1200 | 13.6-135.6 | 138-1382 | 17 | 2.2 | 20M1666 | 351.39 |
| 2503CF3 | 1/2 | 25-250 | 300-3000 | 33.8-338 | 345-3456 | 27 | 3.5 | 20M1896 | 411.07 |

(89691)

TORQUE WRENCHES

DIAL INDICATING CLASSIC SERIES TORQUE WRENCHES

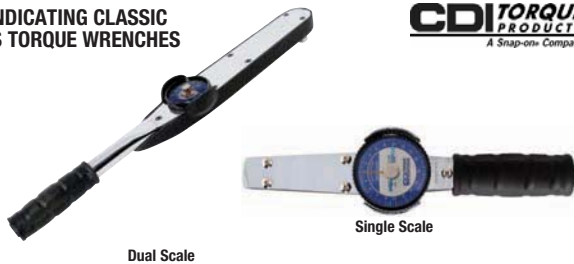

Dual Scale

Single Scale

- Wide selection of torque ranges
- Easy to read scale with clear laser markings
- Available in English or Newton Meter Scale
- Torsion bar design
- Individually serialized with matching certificate of

- calibration traceable to N.I.S.T.
- Most models supplied in blow molded plastic box
- User assured of long life and reliability
- Accuracy: ± 4% of indicated value, CW & CCW, from 20% to 100% of full scale

The **Classic series** features sturdy torsion beam design for dependable long life and accuracy. The small frame **Classic series** offers working ranges from 3 in. lbs. to 50 ft. lbs. in 1/4" and 3/8" drives. The large frame **Classic series** continues from 100 ft. lbs. through 2,000 ft. lbs. with 1/2", 3/4" and 1" drives. Accuracy of both series of ± 4% meets or exceeds ASME B107.14M-1994, ISO 6789 bi-directionally from 20% to 100% of scale. All wrenches supplied with a N.I.S.T. traceable certificate of calibration. 53 Dial indicating models available, *go online or call*.

NEWTON METER SINGLE SCALE

| Mfg. Part No. | Driver Size (In.) | Torque Range (Nm) | Torque Increments (Nm) | Length (In.) | Weight (Lb.) | Stock No. | Price Each |
|---------------|-------------------|-------------------|------------------------|--------------|--------------|-----------|------------|
| 1.81NLDNSS | 1/4 | 0-1.8 | .05 | 11.5 | 1.1 | 20M7747 | 241.46 |
| 3.51NLDNSS | 1/4 | 0-3.5 | .1 | 11.5 | 1.1 | 20M1906 | 250.86 |
| 91NLDNSS | 1/4 | 0-9 | .2 | 11.5 | 1.1 | 20M3123 | 250.86 |
| 92NLDNSS | 3/8 | 0-9 | .2 | 11.5 | 1.1 | 20M3262 | 250.86 |
| 182NLDNSS | 3/8 | 0-18 | .5 | 11.5 | 1.1 | 20M1780 | 305.68 |
| 302NLDNSS | 3/8 | 0-30 | .5 | 11.5 | 1.1 | 20M1913 | 250.86 |
| 352NLDNSS | 3/8 | 0-35 | 1 | 11.5 | 1.1 | 20M7754 | 322.64 |
| 702NLDNSS | 3/8 | 0-70 | 2 | 15.0 | 1.6 | 20M2940 | 273.71 |

ENGLISH SINGLE SCALE INCH POUND

| Mfg. Part No. | Driver Size (In.) | Torque Range (In. Lb.) | Torque Increments (In. Lb.) | Length (In.) | Weight (Lb.) | Stock No. | Price Each |
|---------------|-------------------|------------------------|-----------------------------|--------------|--------------|-----------|------------|
| 301LDINSS | 1/4 | 0-30 | .5 | 11.5 | 1.1 | 20M1912 | 250.86 |
| 751LDINSS | 1/4 | 0-75 | 1 | 11.5 | 1.1 | 20M2948 | 250.86 |
| 752LDINSS | 3/8 | 0-75 | 1 | 11.5 | 1.1 | 20M2950 | 250.86 |
| 3002LDINSS | 3/8 | 0-300 | 5 | 11.5 | 1.1 | 20M1910 | 250.86 |
| 6002LDINSS | 3/8 | 0-600 | 10 | 15.0 | 1.6 | 20M2157 | 273.71 |

ENGLISH SINGLE SCALE FOOT POUND

| Mfg. Part No. | Driver Size (In.) | Torque Range (Ft. Lb.) | Torque Increments (Ft. Lb.) | Length (In.) | Weight (Lb.) | Stock No. | Price Each |
|---------------|-------------------|------------------------|-----------------------------|--------------|--------------|-----------|------------|
| 252LDFNSS | 3/8 | 0-25 | 1 | 15.0 | 1.6 | 20M1902 | 221.26 |
| 502LDFNSS | 3/8 | 0-50 | .5 | 11.5 | 1.1 | 20M1946 | 273.71 |

ENGLISH AND NEWTON METER DUAL SCALE FOOT POUND

| Mfg. Part No. | Driver Size (In.) | Torque Range | | | Length (In.) | Weight (Lbs.) | Stock No. | Price Each | |
|---------------|-------------------|-----------------|-----------------|-------------------------|--------------|---------------|-----------|------------|--------|
| | | English In. Lb. | Newton Meter Nm | Newton Meter Increments | | | | | |
| 301LDIN | 1/4 | 0-30 | .5 | 0-3.5 | .1 | 11.5 | 1.1 | 20M1911 | 250.86 |
| 751LDIN | 1/4 | 0-75 | 1 | 0-9 | .2 | 11.5 | 1.1 | 20M2947 | 250.86 |
| 3002LDIN | 3/8 | 0-300 | 5 | 0-35 | 1 | 11.5 | 1.1 | 20M1909 | 250.86 |
| 6002LDIN | 3/8 | 0-600 | 10 | 0-70 | 2 | 15.0 | 1.6 | 20M2156 | 273.71 |

ENGLISH AND NEWTON METER DUAL SCALE INCH POUND

| Mfg. Part No. | Driver Size (In.) | Torque Range | | | Length (In.) | Weight (Lbs.) | Stock No. | Price Each | |
|---------------|-------------------|-----------------|-----------------|-------------------------|--------------|---------------|-----------|------------|--------|
| | | English Ft. Lb. | Newton Meter Nm | Newton Meter Increments | | | | | |
| 252LDFN | 3/8 | 0-25 | .5 | 0-35 | 1 | 11.5 | 1.1 | 20M1901 | 221.26 |
| 502LDFN | 3/8 | 0-50 | 1 | 0-70 | 2 | 15.0 | 1.6 | 20M1945 | 273.71 |

(89694)



MICRO-ADJUSTABLE METAL HANDLE TORQUE WRENCHES



- Dual scale, calibrated dual direction
- Positive Lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read Laser marked scales
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.
- Most feature Quick Release buttons which provide good socket retention as well as easy socket removal
- Accuracy: ± 4% clockwise ± 6% CCW of indicated value, CW, from 20% to 100% of full scale
- Meets or exceeds ASME B107.14M-1994, ISO 6789 Standards

Micrometer adjustable "click" torque wrenches are easy to operate, and have many industrial, automotive, and aircraft uses. All wrenches have easy-to-read precision laser marked scales. Both models feature dual scales, in English or Newton Meter units. To set the desired torque, simply pull down the lock ring and turn the handle to the desired torque setting. Once set, the positive locking device locks in the torque setting. When the desired torque is reached, an impulse can be felt through the handle along with an audible "click". Most ratchets feature a "Quick Release" push button that both locks the socket in place and makes socket changes quick and easy. A wide variety is available from 10 in. lbs. to 2000 ft. lbs., *go online or call Newark*.

ENGLISH DUAL SCALE INCH POUND

| Mfg. Part No. | Drive Size (In.) | Torque Range (In. Lb.) | Length (In.) | Weight (Lbs.) | Stock No. | Price Each |
|---------------|------------------|------------------------|--------------|---------------|-----------|------------|
| 501MRMH | 1/4 | 10-50 | 10.15 | .85 | 20M1943 | 201.13 |
| 1501MRMH | 1/4 | 20-150 | 10.15 | .90 | 20M1732 | 201.13 |
| 1502MRMH | 3/8 | 20-150 | 10.15 | .90 | 20M1738 | 201.13 |
| 2002MRMH | 3/8 | 30-200 | 10.15 | .85 | 20M1875 | 201.13 |
| 2502MRMH | 3/8 | 30-250 | 11.25 | .95 | 20M1891 | 207.70 |
| 7502MRMH | 3/8 | 100-750 | 16.00 | 2.50 | 20M2946 | 218.63 |
| 1002MRMH | 3/8 | 150-1000 | 16.00 | 2.50 | 20M1654 | 218.63 |
| 25003MRMH | 1/2 | 300-2500 | 18.00 | 3.20 | 20M1885 | 264.56 |

ENGLISH DUAL SCALE FOOT POUND

| Mfg. Part No. | Drive Size (In.) | Torque Range (Ft. Lb.) | Length (In.) | Weight (Lbs.) | Stock No. | Price Each |
|---------------|------------------|------------------------|--------------|---------------|-----------|------------|
| 1002MFRMH | 3/8 | 10-100 | 16.00 | 2.55 | 20M1667 | 218.63 |

ENGLISH SINGLE SCALE FOOT POUND

| Mfg. Part No. | Drive Size (In.) | Torque Range (Ft. Lb.) | Length (In.) | Weight (Lbs.) | Stock No. | Price Each |
|---------------|------------------|------------------------|--------------|---------------|-----------|------------|
| 752MFRMHSS | 3/8 | 5-75 | 16.00 | 2.5 | 20M2951 | 192.82 |

NEWTON METER DUAL SCALE

| Mfg. Part No. | Drive Size (In.) | Torque Range (Nm) | Length (In.) | Weight (Lbs.) | Stock No. | Price Each |
|---------------|------------------|-------------------|--------------|---------------|-----------|------------|
| 602NMRMHSS | 3/8 | 10-60 | 16.00 | 2.50 | 20M2168 | 218.63 |
| 1002NMRMH | 3/8 | 20-100 | 16.00 | 2.50 | 20M1669 | 192.82 |

(89699)


TORQUE-LIMITING BREAK-OVER WRENCH



- Break-over mechanism minimizes shock to assemblies
- Tamper-proof internal adjustment
- "Breaks-over" when preset torque is reached, eliminating overtorquing
- Small and lightweight, ideal for restricted spaces.
- Handle: L 5" L x 3/16" Diameter.

| Mfg. Part No. | Size | Torque Range (lbf.in) | Stock No. | Price Each |
|---------------|-------|-----------------------|-----------|------------|
| 06005B-104-TB | 3/16" | 3.5-12 | 96M0008 | 111.93 |
| 06005B-106-TB | 5/16" | 3.5-12 | 96M0009 | 142.00 |
| 06005B-109-TB | 7/16" | 3.5-12 | 96M0010 | 111.93 |

(113764)



Huge Expanded Selection of Semiconductors

Go online to find new technologies and proven solutions from world-class and specialist suppliers.

(148846)

TORQUE WRENCHES • VACUUMS

CAM OVER TORQUE-LIMITING WRENCH



- Unique cam action provides high repeatability while eliminating overtorquing
- Anodized quality finish with stainless steel head
- Comfortable rubber hand grip
- Slim profile and light weight
- Non-length dependent
- ESD compliant (IEC 61340-5-1:1998)
- Features an externally adjustable micrometer scale and easy-to-use positive locking adjustment system

| Mfg. Part No. | Drive Size (In.) | Range (lbf.in.) | Stock No. | Price Each |
|---------------|------------------|-----------------|-------------------------|------------|
| 020340 | 1/4 | 10-45 | 49M1882 | 430.00 |
| 020341 | 1/4 | 20-90 | 49M1883 | 442.00 |

(113766)

TITAN 100i TORQUE-LIMITING CLICK WRENCH



- Bi-directional ratchet head
- Easy-to-read dual scale (American & S.I.) protected by a display window
- Graduation collar on the torque handle
- Strong steel shaft with firm, ergonomic grip
- "Push-Button Locking Device" securely locks the preset torque and prevents inadvertent adjustment
- Certificate of calibration
- Positive "click" can be heard and felt when torque is reached

Click-type torque-sensing wrench provides audible "click" to provide fast, simple indication of micrometer-accurate torque settings.

| Mfg. Part No. | Description | Range (lbf.in.) | Stock No. | Price Each |
|---------------|-------------------------|-----------------|-------------------------|------------|
| 280010 | Titan 100i Click Wrench | 20-100 | 49M4822 | 244.00 |

(113767)

PROFESSIONAL HEAVY-DUTY DIGITAL TORQUE WRENCH



- Die-cast housing
- Ergonomic and light weight, yet ruggedly constructed
- Range: 100kg-cm, 980 Newton-cm
- Units: kg-cm, lb-inch and Newton-cm
- Data hold, Peak hold
- High/low resolution selection
- Fast/slow sampling selection
- RS-232 computer interface
- Auto shut-off after 10 min. of non-use
- Optional RS-232 software and cable

Mfg. part no. **72-7606** is an extremely lightweight digital torque wrench. It loosens or tightens bolts up to 86.6lb-inch. Mfg. part no. **72-7606** helps to reduce scrap and rework costs by eliminating over- and under-tightening. It is ideal for use in a wide variety of applications including the manufacture of electronic appliances. Includes soft carrying case, instruction manual and one 9V battery (not supplied). Power consumption approximately 13mA.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------------------|-------------------------|------------|
| 72-7606 | Professional Digital Torque Wrench | 01J3058 | 433.62 |

ACCESSORIES

| | | | |
|----------|-----------------|-------------------------|-------|
| 72-6701A | RS-232 Software | 94H7485 | 34.60 |
| 72-6704 | RS-232 Cable | 18C2268 | 12.95 |

(79016)

ADJUSTABLE TORQUE-LIMITING WRENCH



Click-type torque-sensing wrenches provide audible "click" and/or a few degrees of travel to provide fast, simple indication of micrometer-accurate torque settings. Patented low-friction torque control mechanism produces accurate readings in either direction.

| Mfg. Part No. | Size | Range | Stock No. | Price Each |
|---------------|----------|------------|-------------------------|------------|
| TCl-150RA | 1/4" sq. | 30"-150 lb | 97H3846 | 215.60 |
| TCl-150RA 3/8 | 3/8" sq. | 30"-150 lb | 97H3847 | 222.20 |

(78735)

PRESET TORQUE-LIMITING WRENCH



Click-type torque-sensing wrenches accept a variety of heads to suit specific application requirements. Accepts "A" size heads, ordered separately on this page

| Mfg. Part No. | Torque | Length | Stock No. | Price Each |
|---------------|--------------|--------|-------------------------|------------|
| CHA-6 | 5-50 in-lb | 5.32" | 97H3841 | 112.47 |
| CHA-11 | 10-100 in-lb | 5.75" | 97H3840 | 97.60 |

(78738)

OPEN-END HEADS



Open-end, U.S. standard "A".

| Mfg. Part No. | Opening Size | Max. Torque (In.-Lb.) | Stock No. | Price Each |
|---------------|--------------|-----------------------|-------------------------|------------|
| OP 102 | 5/16" | 138 | 97H3843 | 46.75 |
| OP 122 | 3/8" | 275 | 97H3844 | 46.75 |
| OP 82 | 1/4" | 67 | 97H3845 | 46.75 |

(78736)

CORDLESS 18V™ WET/DRY PORTABLE VACUUM



- Cordless — works on all Milwaukee 18V™ slide-on batteries, Li-ion or NiCd
- Powerful motor to provide strong suction and air flow
- Tool box style for easy transport and storage
- On-board accessory and hose storage
- Built-in blower port
- Uses reusable wet/dry HEPA-rated high-efficient filter
- 5-year manufacturer's warranty

Mfg. part no. **0880-20** wet/dry vacuum offers long continuous run time, and high air power and suction to provide quick and easy removal of dust, debris and water. Powered by Milwaukee™ 18V™ slide-on batteries, Li-ion or NiCd; ordered separately, go online or call. Uses a washable, reusable wet/dry HEPA-rated high-efficient filter for excellent fine dust collection. The stackable toolbox design, on-board hose and accessory storage offer excellent portability and convenience. A built-in blower port allows the vacuum to double as a blower, and the 1/4" hose allows standard vacuum attachments to be easily fastened. Comes complete with vacuum, filter, wireless vinyl hose, a crevice tool, and a wide nozzle. Two gallon capacity, 18VDC, 45 cu. ft./min. max. air flow. Dimensions: 11.5H x 19W x 8.5"D.

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-------------------------|-------------------------|------------|
| 0880-20 | Cordless Wet/Dry Vacuum | 96M8783 | 144.18 |

(113776)

New products added weekly

See the newest products, technologies and suppliers on our website.



Make it easy. Make it fast. Make it Newark.

(148887)

TOOL BALANCERS

Tool Balancer keeps your torque equipment at an ergonomic height for the operator. Ergonomic spring release provides a safety lock giving extra control of the tool. Stainless steel cable can recoil or provide more length for better maneuverability to reach multiple applications. Gear mechanism allows more exact adjustment of tension.



| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-------------------------|-----------|------------|
| ASB-0C | 1.1 - 3.3 lbs. Capacity | 49H8504 | 69.33 |
| ASB-3C | 3.3 - 6.6 lbs. Capacity | 35H8575 | 93.02 |

(75382)

WRECKING CROWBAR



- Suitable for removing nails, dismantling, prising and opening
- Weight: 1.9kg

TL10366

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|------------------------------|-----------|------------|
| TL10366 | Wrecking Crowbar, 24" x 3/4" | 01N3615 | 4.33 |

(116753)

HOLESAW KITS



- Bi-metal construction for strength and durability
- Cuts mild steel, bronze, copper, brass, aluminium, all woods, plywood, plastics

TL10469

| Mfg. Part No. | Description | Stock No. | Price Each |
|---------------|-----------------------------|-----------|------------|
| TL10469 | 9-Pc. Bi-Metal Hole Saw Kit | 01N3620 | 19.40 |

(116689)

GREAT ONLINE RESOURCES



TechCast Product Training
 Technical training modules provide specific application guidance for the latest products & more.
www.newark.com/techcast



New Product Portal
 Click here to find the newest products and technologies we add each week.
www.newark.com/new

"MY ACCOUNT" eSuite
 Track your current purchases, view your complete order history and invoices, and turn a Newark quote into an instant online order.
www.newark.com/esuite



Selector Tools
 Use special online tools to fast track selection for custom power supplies, connectors, re-reeling and more.
www.newark.com/selectors



Make it easy. Make it fast. Make it Newark.

(148863)