


Electrical Accessories, Conduit & Trunking

	Page		Page
Conduit - Pliable	1640	Mains Distribution	1638
Energy Meters	1642	Trunking	1640

Mains Plugs

Quick Fit Nylon Plugs



High quality plugs manufactured from robust nylon. The plugs have a screwless cordgrip which makes installation quick and easy. Available with 3A, 5A or 13A fuses fitted. BS1363/A approved.

338668.261340

Description	Order Code	Price Each	
		1+	3+
3A White	507-8090	---	---
5A White	507-8106	---	---
13A White	507-8118	---	---
3A Black	507-8120	---	---
5A Black	507-8131	---	---
13A Black	507-8143	---	---
13A Red	867-3039	---	---

UK Mains Plugs



A range of 13A rated 3-pin UK mains plugs manufactured from nylon and urea. The plugs have an integral screw type cord grip and are BS1363 approved (fitted with BS approved 3A, 5A or 13A fuses). Available in white.

525510

Current Rating	Order Code	Price Each	
		1+	5+
3A	166-1469	---	---
5A	166-1470	---	---
13A	166-1471	---	---

Surge Protected Plug Top



Surge protected plug designed to protect sensitive electronic equipment from the damage caused by power surges.

- Ideal for use with audio/video equipment, computer equipment and other electrical appliances
- LED indicator shows that protection is present
- 13A fuse fitted
- Conforms to BS1363

Operating voltage 240V
Max. Current rating 13A
Max. Surge current 2500A
Clamping voltage 775V

525494

Order Code	Price Each	
	1+	5+
166-1446	---	---

Join our element14 Community

Get inspired at our electronics community. Collaborate, design, research, ask the experts and access electronics legislation information.
element14.com

element14
COMMUNITY

RCD Adaptors

Rewireable RCD Plug



A rewireable RCD (Residual Current Devices) plug, for protection and peace of mind for higher risk electrical equipment against electrocution. This unit offers an opportunity to hard wire your appliances so that an RCD must be used at all times.

- Replaces standard mains plug
- Ideal for gardening equipment or power tools
- Manufactured from impact resistant materials
- Tested to BS7071

Voltage Rating 230V ac, 50Hz
Maximum Load 13A
Trip Current 30mA max.
Trip Time 30ms max.

381830.381992

Order Code	Price Each	
	1+	3+
853-5892	---	---

RCD Adaptor




- Safety RCD plug-in adaptor that continuously monitors the power supply to an electrical appliance
- Cuts off the power in less than 30ms if an earth current fault is detected
- Ideal for use around the home or with garden equipment, power tools and Christmas decorations
- Provides safety against electric shock
- Indicator shows that protection is present
- 13A fuse fitted
- Complies with BS7071:1992

Voltage Rating 240V 50Hz
Maximum Current 13A
Maximum Load 3.2kW
Rated Trip Current 30mA
Trip time <30ms
Approvals BS
Colour Dark Grey
Dimensions (HxWxD) 117x50x44mm

505801/523303

Order Code	Price Each		
	1+	5+	10+
164-8198	---	---	---

In-line IP65 Sealed

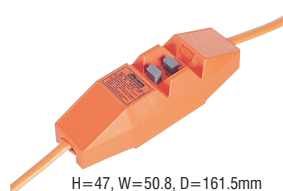

H=47, W=50.8, D=161.5mm

A heavy duty 16A in-line RCD unit providing double pole protection, for use in wet or dirty environments where rough handling is expected. Sealed to IP65, the unit is supplied with 0.3m of 1.5mm² cable on the input and 0.6m of 1.5mm² cable on the output. Plugs, sockets or connectors of the same IP rating must be used to maintain IP65 integrity. To ensure the IP rating, terminals and cover should be sealed with the supplied sealant.

For IP67 in-line connector see Order Code 179-555

Voltage Rating 240Vac
Maximum Load 16A
Trip time 40ms
Trip Current 30mA
Operating Temperature -5°C to +40°C
Mfrs. List No. J62-T

220500

Order Code	Price Each		
	1+	5+	10+
287-155	---	---	---

Mains Trailing Sockets

13A

Single, rubber
H=28, W=57,
D=78mm



Twin rubber
H=28, W=125,
D=80mm

Contact Rating
Max. load
Manufactured to

13A @ 250V
3.12W
BS1363A



219686

Colour	Mfrs. List No.	Order Code	Price Each			
			1+	10+	25+	100+
Single						
Black	FC133BLK	313-543	---	---	---	---
White	FC133WHI	313-555	---	---	---	---
Orange	FC133ORG	313-567	---	---	---	---
Twin						
Black	FCT133BLK	313-579	---	---	---	---
White	FCT133WHI	313-580	---	---	---	---
Orange	FCT133ORG	150-709	---	---	---	---

15A Round Pin



Contact Rating 15A@250V AC
Max. load 3.6kW
Wire Size (min.) 1.5mm²
Manufactured to BS5733
Housing Black Rubber
Contacts Brass

H=33, W=82, D=113mm



219696

Order Code	1+	10+	50+	100+
269-141	---	---	---	---

13A Rubberised Extension Sockets

PRO-ELEC



Manufactured from high impact rubberised plastic, rated at 13A and conforms to BS1363/A. Available in black, white or orange.

449431.435679

Colour	No. of Ways	Order Code	Price Each	
			1+	10+
Black	One	128-6442	---	---
White	One	128-6443	---	---
Orange	One	128-6445	---	---
Black	Two	128-6446	---	---
White	Two	128-6447	---	---
Orange	Two	128-6448	---	---

4 and 6 Gang Sockets

PRO-ELEC



A four or six gang socket with integral neon indicator. Rated at 13A and conforms to BS 1363/A.

449419.437915

Description	Order Code	1+	10+
4 Gang	128-6436	---	---
6 Gang	128-6437	---	---

Mains Distribution

'Quadbox' 4 way IEC

SCHURTER
ELECTRONIC COMPONENTS



- Compact distribution module
- 4 IEC 320 Class I unshuttered outlets
- Surface mounting
- Uses separate cordset
- Approvals, UL & CSA

H=37, W=147, D=44mm

Contact rating 15A @ 250Vac
Temperature range -20°C to 70°C
Housing Polyamide 6
Contacts UL94V-0
Brass, Tin Plated

219735

Colour	Order Code	Price Each			
		1+	10+	50+	100+
Black	112-5809	---	---	---	---

Stripbloc™ 5 and 6 Way IEC

SCHURTER
ELECTRONIC COMPONENTS



IEC inlet

- A range of European most plug with multi-way outlets
- Black ABS moulding, incorporating IEC320 components
- IEC320 components approvals: BEAB/BSI, UL, CSA and VDE
- Common housing for 5 and 6 way
- 5 way unit has red 'mains-on' neon indicator
- Panel mount version has 6.35mm push-on tabs

Trailing/wall mounted

5 and 6 way - 2m lead and plug
H=40, W=228, D=59mm
Fixing centres=200 x 44, 3.2mm diaP

Current rating	6A @250Vac (fused) 10A @250Vac (non-fused)	Housing	Black ABS
Fuse (where fitted)	6.3A, 20x5 mm	Outlets	Black noryl, UL94V-0
Temperature range	-5°C to 60°C	Contacts	Brass, Nickel Plated
Mfrs. List No.	R47404300=561-101 R47404300=561-101 R47404300=561-101		R47406000=269-190 R47403000=147-722 R47403600=439-277

219693

		Price Each					
	Order Code	1 +	5 +	10 +	50 +	100 +	250 +
IEC Inlet							
5 outlets & illum. Switch	269-190	---	---	---	---	---	---
5 outlets, neon & fuse	147-722	---	---	---	---	---	---
2m Mains Lead							
5 outlets, neon & fuse & 13A plug	150-632	---	---	---	---	---	---
5 outlets, neon, fuse & 90° schuko plug	439-277	---	---	---	---	---	---
6 outlets & 13A plug	561-095	---	---	---	---	---	---
6 outlet & 90 schuko plug	561-101	---	---	---	---	---	---

Extension Leads

Individually Switched Surge Protected Extension Leads

PRO-ELEC



- Surge and Spike protected
- Individually switched with full red neon switches
- Ideal for use with computer, audio / video and other sensitive electrical devices
- Wall Mountable
- Max. Surge Current 4500A
- Clamping voltage - 775V
- Max. Load 13A / 250V
- 2m Lead
- BS1363/A and BS5733/A Compliant

525515

Description	Order Code	1+	5+
4 Gang	166-1499	---	---

Extension Leads Individually Switched with Neon

PRO-ELEC



- Stylish, compact design
- Individually switched with full red neon switches
- Wall Mountable

- Max. Load 13A / 250V
- 2m Lead
- BS1363/A Compliant

525518

Description	Order Code	Price Each	
		1+	5+
4 Gang	166-1505	---	---

4 Gang Switched Surge Protected Extension Lead

PRO-ELEC



- Surge and RFI protected
- Fitted with removable 13A fuse
- Neon indicator
- Wall mountable

- Heavy duty, strong design
- 2m cable
- Conforms to BS1363/A and BS5733/A

Operating voltage 240V
Max. Current rating 13A
Max. Surge current 4500A
Clamping voltage 775V

526404

Order Code	Price Each	
	1+	5+
166-1456	---	---

Surge Protected Extension Leads

PRO-ELEC



Surge Protected extension leads with integral neon indicator. Rated at 13A and conform to BS 1363/A. Available as a 4 or 6 gang version.

449430.434026

Description	Order Code	Price Each	
		1+	10+
4 Gang 2m Lead	128-6492	---	---
4 Gang 5m Lead	128-6494	---	---
4 Gang 8m Lead	128-6495	---	---
6 Gang 2m Lead	128-6496	---	---

6 Gang Extensions

PRO-ELEC



A range of six gang extensions with various lead lengths. Rated at 13A and conform to BS 1363/A.

449420.437916

Description	Order Code	Price Each	
		1+	10+
White 1m	128-6479	---	---
White 2m	128-6480	---	---
White 3m	128-6482	---	---
White 5m	128-6483	---	---
White 10m	128-6484	---	---

6 Gang Heavy Duty Switched Surge Protected Extension Lead

PRO-ELEC



- Surge and RFI protected
- Fitted with removable 13A fuse
- Neon indicator
- Wall mountable
- Heavy duty, strong design
- 2m cable
- Conforms to BS1363/A and BS5733/A

Operating voltage 240V
Max. Current rating 13A
Max. Surge current 4500A
Clamping voltage 775V

240V
13A
4500A
775V

525507

Order Code	Price Each	
	1+	5+
166-1458	---	---

Mains Extension Reels

PRO-ELEC

Twin Socket Reel Extensions



Cassette reel twin socket extensions. Available with 6m or 10m lead length. Rated at 5A and conform to BS EN61242.

449435.437922

Description	Order Code	Price Each	
		1+	10+
6m	128-6406	---	---
10m	128-6408	---	---

Four Socket Reel Extensions

PRO-ELEC



A range of handbag style reel extensions with four sockets. Available with various lead lengths. Rated at 13A and conform to BS EN61242.

449436.437923

Description	Order Code	Price Each	
		1+	10+
15m	128-6409	---	---
20m	128-6410	---	---
25m	128-6411	---	---

Metal Drum Cable Extensions

PRO-ELEC



Mains Extension Reels - continued

Metal Drum Cable Extensions - continued

Metal drum cable extensions with twin or four socket extensions. Available with various lead lengths and conform to BS EN61242.


- Twin sockets are rated at 5A 240V
- Four sockets are rated at 13A 240V

449437.437924

Description	Order Code	Price Each	
		1+	10+
2 Gang 5A 15m	128-6412	---	---
2 Gang 5A 25m	128-6413	---	---
4 Gang 13A 15m	128-6415	---	---
4 Gang 13A 20m	128-6416	---	---
4 Gang 13A 25m	128-6417	---	---
4 Gang 13A 30m	128-6418	---	---
4 Gang 13A 40m	128-6421	---	---
4 Gang 13A 50m	128-6422	---	---

Mains Leads

Mains Lead – 'Fig. 8' to Bare Ends – 2 Core



AC Mains Lead for calculators and other similar light current equipment. Manufactured with sheathed cable. For professional use only.


Pin Centres
Plug Dimensions
Length

8.5mm
12.5x8mm
2m

449404.261297

Colour	Order Code	Price Each	
		1+	10+
Black	128-6427	---	---

UK Plug to Bare Ends




Moulded 3-pin UK mains plugs to stripped, bare ends. The plugs have integral 5A or 13A fuses and are manufactured from 0.75mm² or 1.0mm² approved cable respectively.

383403.261298

Description	Order Code	Price Each	
		1+	3+
5A, 0.75mm² Cable			
Black - 2m	128-3786	---	---
Black - 3m	167-1729	---	---
13A, 1.0mm² Cable			
Black - 2m	128-3788	---	---

2 Pin Euro Plug To 'Figure 8'



- Moulded 2-pin Euro plug to figure 8 type mains connector
- 2.5A Rated
- 0.75mm² cable

338835.261331

Colour	Length	Order Code	Price Each	
			1+	3+
Black	2m	128-3799	---	---

Economy UK to IEC Mains Lead – 2m

PRO-ELEC



Low cost mains leads terminating in UK plugs and IEC cold condition plugs. The leads are rated at 5A. UK plugs are fused and BS approved.

383390.261312

Description	Order Code	Price Each	
		1+	3+
Black - 2m	128-3803	---	---

Conduit - Pliable

Protective Split Corrugated Polyamide Conduit

PRO-ELEC



The split conduit is ideal for protecting assembled cables after installation.

- Highly flexible
- Split remains closed under torsion
- UV resistant for photovoltaic applications
- Easy installation
- Operating temperature -40°C to 140°C
- Supplied in 25m Coils



522397

Mfrs. List No.	Diameter		Order Code	Price Per Coil		
	Internal (mm)	External (mm)		1+	5+	10+
61806560	9.9	13	164-2142	---	---	---
61806565	12.2	15.7	164-2143	---	---	---
61806570	16.6	21.2	164-2144	---	---	---
61806580	23.2	28.3	164-2146	---	---	---

Trunking

Self-Adhesive Mini One Piece Trunking

D-LINE



Mini 30x15mm trunking is ideal for hiding cable drops, while the unique shape can provide a discrete cable path above skirting tops. The patented hinged and click-lock lid in a single piece design makes the product easy to handle and easy to later add or remove cables. Also available are packs of flush-fit accessories for the perfect finish.

The fire clip has been tested to satisfy cable management requirements of BS5839 part 1. The tests confirm that the fire clips, when subjected to 830°C (±40°C) for 30 minutes at a voltage of 500V rms, enabled the FP cables to maintain circuit integrity. The fire clip is manufactured from high temperature steel, with a gold passivated finish to provide protection against mildly corrosive elements. With no sharp edges and easy to fold tabs the fire clip is simple to use.

- Applications:
- Drops for Switches and Fire Call points
 - For Satellite & Aerial
 - Above Skirting Tops

Accessory Pack Contents: 5 x Coupler, 2 x Internal bend, 2 x External bend, 2 x Flat bend, 2 x End cap, 2 x Cable outlet and Equal Tee

535014

2m Lengths		Order Code	Price Per Pack		
Description	Pack Qty		1+	5+	10+
30 x 15mm Trunking	6	170-2080	---	---	---
Accessories					
Accessories Pack (Flush Fit)	16	170-2081	---	---	---
Fire Clip	12	170-2082	---	---	---

Open Slot Betaduct



- A range of CSA and Lloyds approved trunking with open slots and snap-on lids, base slotted to DIN43659
- Manufactured in Grey PVC with limiting oxygen index (L.O.I.) 43

Operating temperature -15°C to +60°C

Internal Dimensions (mm)		Slot Dimensions (mm)		Pitch (mm)	Order Code
H	W	H	W		
37.5	25	16.0	8	19.1	157-8131
50	25	29.5	8	19.1	157-8132
25	50	12.0	8	19.1	157-8134
50	50	29.5	8	19.1	157-8135


207978

Packs of 4 x 1m Lengths

Price Per Pack

H (mm)	W (mm)	Order Code	1+	5+	10+	25+	50+	100+
37.5	25	157-8131	---	---	---	---	---	---
50	25	157-8132	---	---	---	---	---	---
25	50	157-8134	---	---	---	---	---	---
50	50	157-8135	---	---	---	---	---	---

Closed Slot Betaduct



- A range of **CSA** and **Lloyds** approved trunking with closed slots and snap-on lids, base slotted to **DIN43659**
- Manufactured in Black PVC with limiting oxygen index (L.O.I.) **43**

Operating temperature -15°C to +60°C

Internal Dimensions (mm)		Slot Dimensions (mm)		Pitch (mm)	Order Code
H	W	H	W		
15	15	4.0	11	19.1	157-8127
20	25	11.0	5	9.5	157-8128
50	25	29.5	8	19.1	157-8129
50	50	29.5	8	19.1	157-8130


224093

Packs of 4 x 1m Lengths

Price Per Pack

H (mm)	W (mm)	Order Code	1+	5+	10+	25+	50+	100+
15	15	157-8127	---	---	---	---	---	---
20	25	157-8128	---	---	---	---	---	---
50	25	157-8129	---	---	---	---	---	---
50	50	157-8130	---	---	---	---	---	---

Cable Trunking



- Manufactured in Grey (RAL 7040) thermo-plastic polymer
- Flame retardant to **UL94V-0**
- Adhesive backed
- Good resistance to UV rays and chemicals
- Dielectric constant to **ASTM D2863**

Dimensions (mm)		Mfrs. List No.	Order Code
H	W		
12.5	12.5	B905	317-8500
16	16	B906	317-8511
20	20	B907	317-8523
25	25	B908	317-8535
30	30	B909	317-8547
40	40	B910	317-8559
50	50	B911	317-8560

208324

Operating temperature -40°C to +140°C

Packs of 10 x 0.5m Lengths


Price Per Pack

H (mm)	W (mm)	Order Code	1+	5+	10+	25+	50+	100+
12.5	12.5	317-8500	---	---	---	---	---	---
16	16	317-8511	---	---	---	---	---	---
20	20	317-8523	---	---	---	---	---	---
25	25	317-8535	---	---	---	---	---	---
30	30	317-8547	---	---	---	---	---	---
40	40	317-8559	---	---	---	---	---	---
50	50	317-8560	---	---	---	---	---	---

Sockets, Switches & Accessories

Logic plus™

Switchsocket Outlets: 13 Amp



H=86, W=146, D=17, fixing centres 120.6mm

- In line terminals for easy connection
- 3-Pin operated safety shutter
- Backed out captive terminal screws
- Double pole switching
- Optional neon in rocker for high visibility status indication
- Approved to **BS1363 PT2:1995**

211974

Mfrs.		Price Each				
List No.	Order Code	1 +	10 +	30 +	50 +	
DP Switched						
1 Gang	K2757WHI	987-190	---	---	---	
2 Gang	K2747WHI	987-207	---	---	---	

Socket Outlet, 13 Amp, Panel Mounting



10 YEAR GUARANTEE



- Electrical connections are via brass screw terminals with side cable entry
- Supplied with M3.5 threaded eyelets and fixing screws
- Approved to **BS1363 : 1984**

Circular Panel cut-out dia=50, Fixing centres=60.3, Rear projection=23mm

Housing Urea Formaldehyde(White)

Maximum panel thickness

2mm

212141

		Price Each			
Mfrs. List No.		Order Code	1 +	10 +	20 +
Circular	735WHI	107-721	---	---	---

Panel Mounting Socket Outlet



- 13A socket for panel mounting, in moulded white urea formaldehyde
- Approved to **BS1393 : 1984**

Panel Mounting cut-out dia=50mm
Fixing holes dia. 4mm at 60.3mm centres**Note:** To comply with **BS1363** the panel mount socket must be at least 10mm from panel edge

Mfrs. List No. F3006

211972

Order Code		Price Each			
		1+	10+	20+	100+
Panel Mounting	146-970	---	---	---	---

13A Switched Sockets

PRO-ELEC



- Single or twin 13A switched sockets
- Quick and simple installation
- Twin sockets available in single or double pole
- Manufactured to BS1363

449406.430066

		Price Each	
Description	Order Code	1 +	10 +
1 Gang Single Pole	128-6508	— — —	— — —
2 Gang Single Pole	128-6506	— — —	— — —
2 Gang Double Pole	128-6507	— — —	— — —

Sockets, Switches & Accessories - Metalclad

Socket Outlets, 13 Amp

Sockets
H=86, W=86 (146 2 Gang), D=51mmRCD
H=86, W=147, D=54mm

- Manufactured in heavy gauge steel and finished with a hard wearing epoxy/polyester and metallic powder paint coating
- Easy to install, clear white printing gives instant terminal identification
- Terminal screws are backed out and held captive within the housing
- Outboard rockers on 2 gang switchsockets help to stop accidental switching
- Double pole switching

20 YEAR GUARANTEE

One gang switchsockets, two gang outboard switchsockets and two gang unswitched sockets are fitted with two earth terminals on a common busbar to provide a double earth facility for use when installations comply with **Regulation 607 of BS7671, IEE Wiring Regulations**.

Sockets, Switches & Accessories - Metalclad - continued

Socket Outlets, 13 Amp - continued

Mfrs.		Price Each					
Non Switched	List No.	Order Code	1+	2+	5+	10+	20+
1 gang	K848ALM	721-7274	---	---	---	---	---
2 gang	K850ALM	721-7286	---	---	---	---	---
DP Switched							
1 gang	K2977ALM	721-7237	---	---	---	---	---
2 gang	K2946ALM	721-7249	---	---	---	---	---
2 gang + neon	K2446ALM	721-7262	---	---	---	---	---
1 gang RCD protected, 30mA (active)	K6302ALM	721-7298	---	---	---	---	---
1 gang RCD protected, 30mA (passive)	K6305ALM	721-7304	---	---	---	---	---

Socket Outlets, 13A



1 Gang H=82, W=82, Fixing centres=60.3 2 Gang H=82, W=144, D=45mm, Fixing centres=120.7mm

- Supplied with M3.5 fixing screws
- Earth terminal in mounting box
- Approved to **BS1363 : 1984**



Mfrs. List No.		Order Code	Price Each			
			1+	10+	20+	100+
1 Gang, non switched	F3041	147-672	---	---	---	---
2 Gang, non switched	F3042	147-673	---	---	---	---
1 Gang, DP switched	F3141	147-674	---	---	---	---
2 Gang, DP switched	F3142	147-675	---	---	---	---

Metalclad 13A Switched Sockets



- Available as 1 gang or 2 gang
- Conforms to BS 1363
- 40mm depth mounting box

Description		Order Code	Price Each	
			1+	10+
1 Gang	128-6497	---	---	---
2 Gang	128-6498	---	---	---

Metalclad 13A Fused Spurs



- Available as an unswitched or switched version
- 40mm depth mounting box
- Switched version with integral neon indicator
- Conforms to BS 1363

Description		Order Code	1+	10+
Unswitched		128-6504	---	---
Switched		128-6505	---	---

RCD Single Metal Sockets



A range of single metal RCD protected sockets for new installations or to replace existing sockets. The RCD sockets will provide protection against electric shocks and fires when operating home appliances, gardening equipment, power tools and industrial machines/equipment. Units fully comply with BS7288 and BS1363.

Operation: The RCD units will detect potentially dangerous faults by monitoring the integrity of the mains supply and will break the circuit instantaneously if a fault occurs, minimising the risk of potentially fatal electric shocks. Non-latching and Latching types are available. Non-latching types require manual reset to restore power after the power supply is temporarily lost (a must for power tools). Latching types immediately restore power following a power cut.

- Eliminates the need for plug-in circuit breakers
- Extra fast action: Trips out within 40ms
- Automatically disconnects both Live and Neutral connections leaving the earth connection intact
- Test button for safety checks
- Protection is maintained when Neutral is lost or with pulsating DC earth fault currents
- Trips out when the power supply is temporarily lost
- Supplied with a 40mm BS metal surface wall box
- Manufacturers 3 year guarantee

437714/522127

Description		Order Code	1+	5+
Non Latching Type		164-2918	---	---
Latching Type		164-2919	---	---

Weatherproof Accessories

Weathersafe Multi-Connector Box



- IP65 weatherproof rating
- Impact resistant housing
- Integral 4 way socket strip for BS 13A plugs and timers
- Multiple appliance cable outlets
- Spacious design allowing for storage of low voltage garden lighting transformer
- Manufacturers 3 year guarantee

THREE YEAR GUARANTEE

419276.408176

Order Code		1+	3+
109-6629		---	---

Energy Meters

Multifunction Power Meter



This simple to use plug-in power meter, monitors and measures the energy / power consumption and running costs of connected electrical appliances.


- Measures voltage (V), amps (A), watts (W), volt-amps (VA), hertz (Hz) and power factor (PF)
- Ideal for seeing how much power your appliances are consuming
- Easy to read LCD screen

Power Supply 230-240V AC 50Hz
Maximum Load 13A, 3120W
Measure Voltage Range 200-276V AC
Measure Current Range 0.02-16A
Measure Power Range 0-3588W
Measure Frequency Range 45-65Hz
Operating Temperature -10°C to 40°C
Battery 2x1.5V LR44

476803/520482

Order Code		1+	5+
163-8714		---	---


Install with confidence...

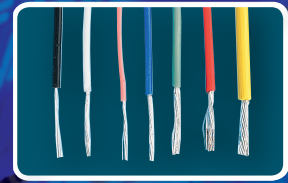

Equipment Wire




Heat Shrink tubing



Industrial and Automation Cable






Braided Sleeving



Data Transmission Cable



Cable Glands- Grommets




Pro-Power offers exceptional value and a large, fully approved product range. With over 5,000 products available in the range, choose Pro-Power for all your Cable, Wire and Accessory needs.


- Choose from our extensive range of cable, wire & accessories
- Cable available in full reels or Cut-to-Length
- Order from element14 for next day delivery with fast, reliable service and support




Die-cast aluminium, metal and plastic enclosures

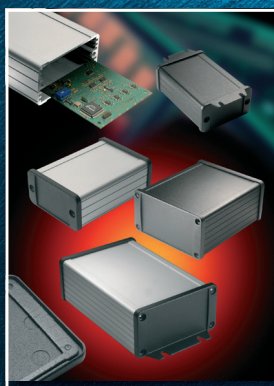

1457 IP65

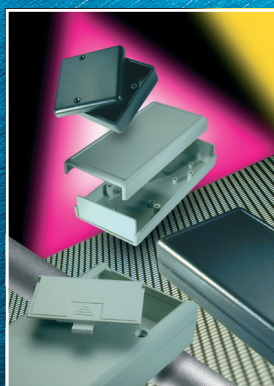


1593

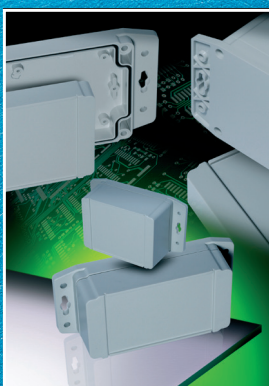

1555 flanged IP67




1590 STOMP

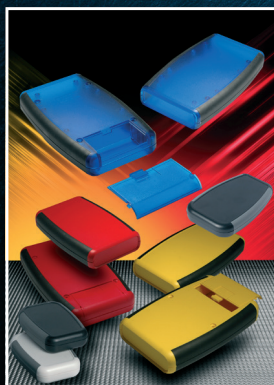


1553



1550Z / 1590Z IP66

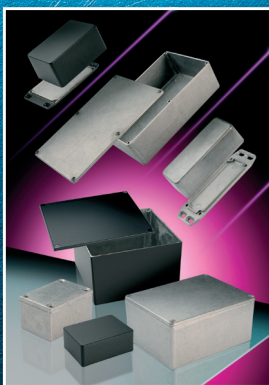

1550 / 1590

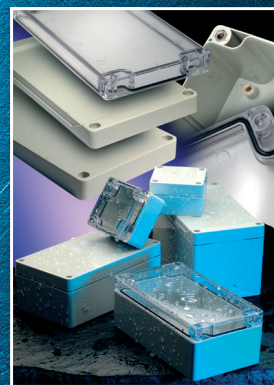

1554 / 1555 IP66



1591 / 1591XX



1590TRP-STP



1455



1551

For the full range of products, visit

India: in.element14.com/hammond

Philippines: ph.element14.com/hammond

Thailand: th.element14.com/hammond

Malaysia: my.element14.com/hammond

Singapore: sg.element14.com/hammond

element14

The new global face of Farnell